

Fresh Water Pumps & Submersible Pumps



Washdown Pump Kits & Water Pressure Systems



Portable, RV and Ceramic Toilets



Other Equipment



SEAFLO®

FUJIAN AIDI ELECTRIC CO.,LTD.

Office Add: No.520 Hengtian Road, Business Operation Center in North Station, Jimei District, Xiamen, Fujian, China

Factory Add: F2-4 Block, Industrial Park, Liancheng County, Longyan City, Fujian, China

Tel/WhatsApp/Wechat: + 86 13860382108

Web: www.seaflo.com

E-mail: business@seaflo.com



Wechat



website



WhatsApp

ACCURACY AND COMPLETENESS OF INFORMATION

All information in this literature regarding products and services provided by SEAFLO is subject to change without prior notice. Reasonable efforts are taken to ensure the accuracy and integrity of all information provided here, but SEAFLO is not responsible for misprints, out-of-date information, or errors. SEAFLO makes no warranty, express or implied, or assumes any legal liability or responsibility for the accuracy or completeness of any information contained in this literature.

SEAFLO®
— Make Water Work For You —

SEAFLO PRODUCT CATALOGUE 2025

RV EQUIPMENT



www.seaflo.com

2008

Brand Created in

4 Million Annual Capacity

160,000 Square meters
1000+ Customers
200+ Patents



SEAFLO group is an ISO 9001 certified, professional marine & RV water system and outdoor solution manufacturer. We have 2 production bases, 2 modern standard workshops of 50000 square meters, more than 200 employees. SEAFLO products and brand is deeply engaged in Marine, RV and outdoor market for more than a decade. We offer professional and reliable service with the cost-effective products of SEAFLO brand and private branding for our partners.

We serve more than 1000 customers in over 100 countries all over the world. We are committed to build a strong and senior technical personnel of research & development team.

We have obtained more than 200 domestic and international patents, and our products have passed CE, RoHS, UKCA, ISO 8846 and ISO 8849, CSA, Reach, PAHs and other international certifications.

SEAFLO Mission: Bring value not only to our customers, but to the world.

SEAFLO Vision: Lead the vanguard of the next generation of great companies.

SEAFLO Value: Learning, Growing, Thankful, Together.



Factory



Xiamen R&D Center



Sales Center



Contents



Fresh Water Pumps

23 / 21 Series Fresh Water Pumps	06
33 Series Fresh Water Pumps	08
41 Series (short) / (long) Water Pumps	09
42 Series (short) / (long) Water Pumps	11
55 Series Fresh Water Pumps	13
56C Series Variable Speed Smart Pumps	14



Water Pressure Systems Accumulator Tank

33 / 42 Water Pressure Systems	15
Accumulator Tanks	17



56 Series Portable Cleaning Kit	18
56 Series Portable Water Transfer Kit	19
Outdoor Camping Shower	20



Submersible / Line Pumps

Portable Shower Pump	20
Low Voltage Submersible Pump	21
Submersible and Line Pumps	23
Galley Pump	25
Shower Sump Pump System	27



Macerator Pumps

Macerator Pump 01 Series	28
Macerator Pump 02 Series	29
Portable Macerator Pump Kit	30



Plastic Accessories

Deck Hatches / Round Deck Hatches	55
External Shower Box and Kit	58
Drink Holder and Air Vent	59
Frost Control Valve	60
Water Inlets and Square Cable Hatch	61
Water Inlet Hatch and Dent Vent	63
Handle and Water Inlet Hatch	65



Toilets

Portable Toilets	31
Residential Height RV Toilets	40
Accessories Electric Toilets	42
Deluxe Flush Electric Toilets	43
Manually Operated Toilets	45



RV Plumbing System

Leveling Blocks & Tongue Jack Stands	67
Caps and Swivel Fittings	67
RV Sewer Hose Kits	68
RV Hose Support	68



Blowers

02 / 04 Series In-Line Blowers	46
Solar Power Ventilator	47



Oil Change System

Fuel Transfer Pump	69
Fuel Cans 5L,10L, 20L	71



Solar Panel System

Solar Panel System	49
--------------------	----



Battery Switches


Battery Switches	51
------------------	----



Other Accessories

Other Accessories	75
-------------------	----

RV PLUMBING SYSTEM

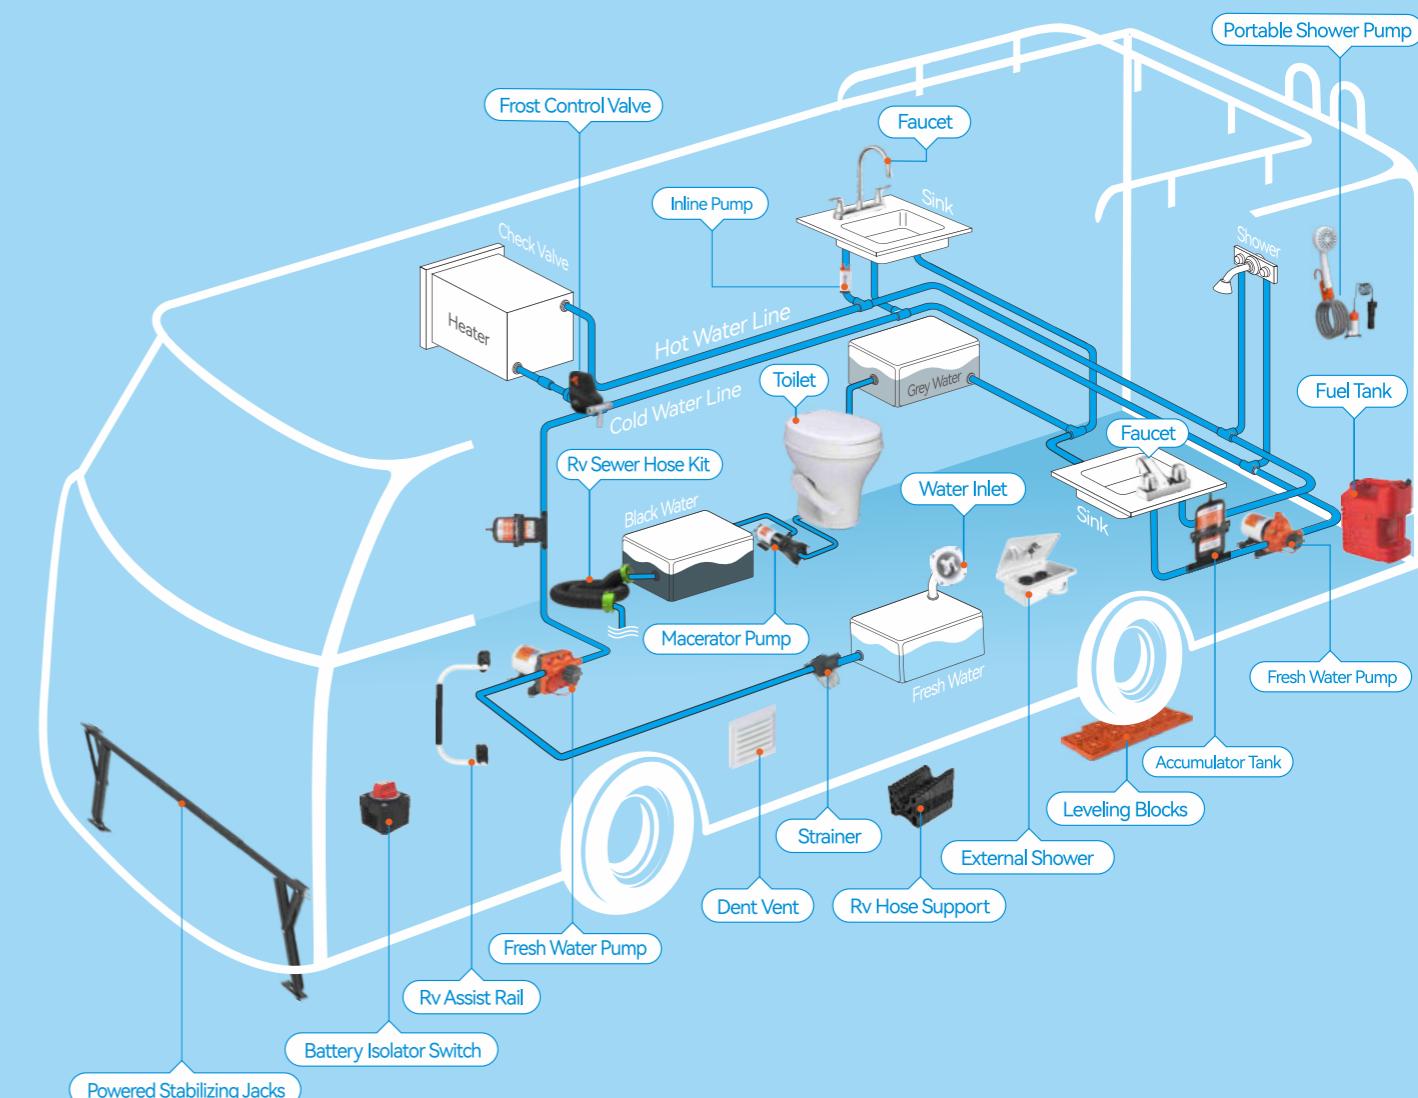



SEAFLO CUSTOM PUMP OPTIONS


CERTIFICATIONS

SEAFLO factory pays high value to ISO system including ISO 9001:2015, ISO 14001:2015 and ISO 18001:2007 for general management and production.


SEAFLO not only has obtained 6 Invention Patents, 52 Utility Model Patents, 143 Design Patents till now, but also received many international authentications including CE, ROHS, REACH, CSA, ISO 8846, ISO 8849, PAHs etc.



CSA

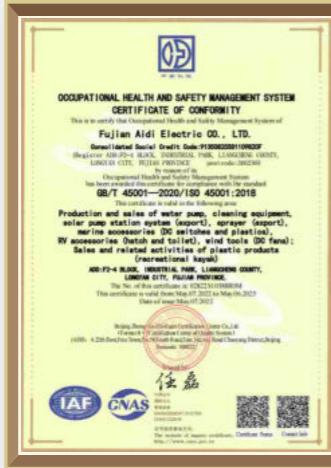

ISO 45001:2018

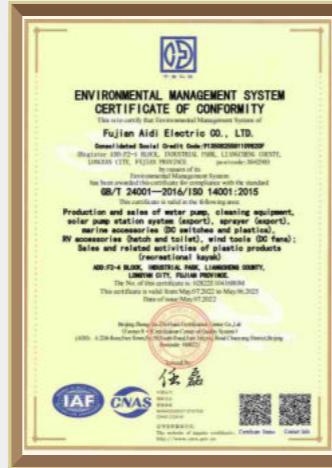

ISO 14001:2015



CE



UKCA



ISO 9001:2015

ISO 8846 ISO 8849




PAHS



RoHs




Reach

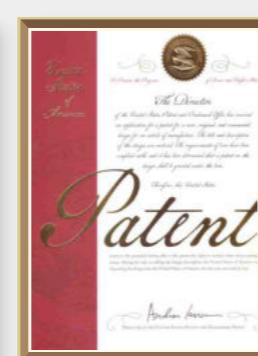

United States Patent

FRESH WATER PUMPS

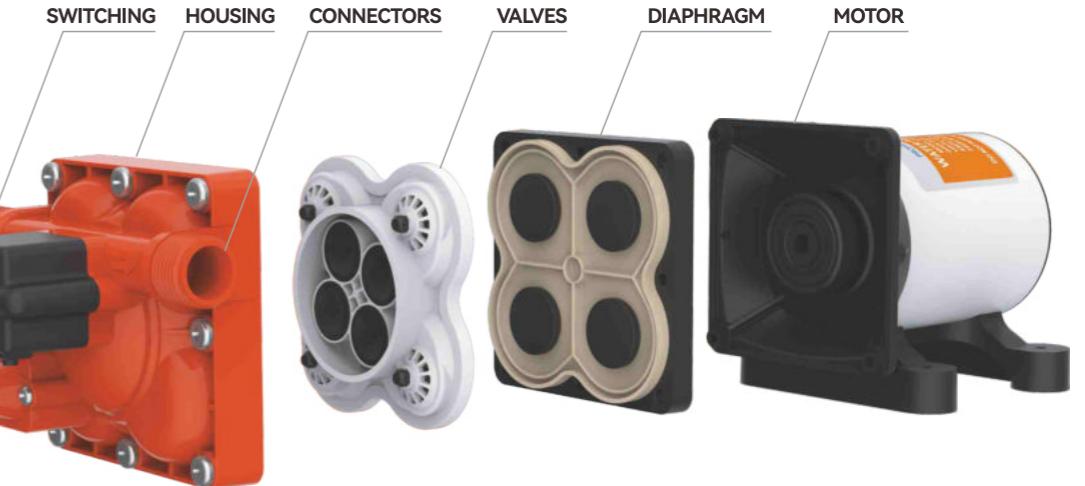

SWITCHING

Bypass
Demand
Dual Controls
No Controls
Smart Controllers

HOUSING

Nylon
Polypro

VALVES

Santoprene
Viton
Geolast
Nylon
Polypro
BUNA
EPDM

CONNECTORS

Quick Attach
FNPT
MNPT

DIAPHRAGMS

Santoprene
Viton
Geolast
Various CAM Sizes
BUNA

MOTORS

Sealed
12,24 Volts
115,230 Volts
Higher Output
Heat Sinks
Lead Sinks
Lead Wires
2 Pin Connector
On/Off Switch
Special Electrical
Connectors Available



Product performance, parameters, appearance can be customized


Additional Options: Barcoding, CE certified, Various packaging options, Custom label/logo

WATER PRESSURE SYSTEMS

FRESH WATER PUMPS



Pressurized Accumulator Tanks

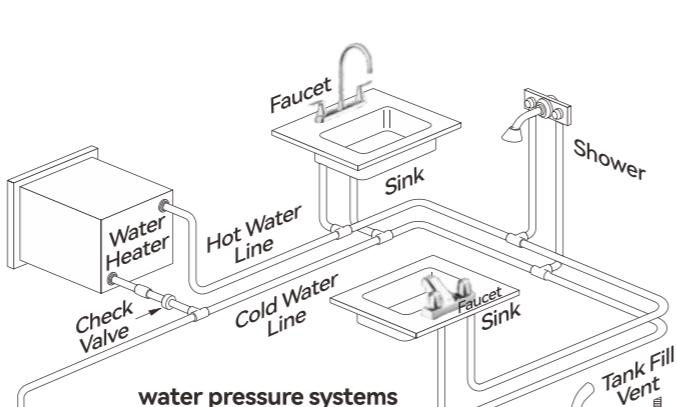

water inlet with water pressure regulator



Accumulator Pressure Boost System



33 Series Fresh water pump



42 Series Fresh water pump

Features & Benefits

SEAFLO is a leading manufacturer of plumbing products for Marine, RV, Agricultural, Industrial, Construction and OEM Applications. Our Fresh Water Pumps are of uncompromised quality, with proven reliability, and a vast variety of options. Our Diaphragm Pumps are available in DC and AC currents, in flows from 0.7 GPM up to 7.0 GPM which can serve 2 to 5 3/8" (10 mm) or 1/2" (13 mm) outlets. This automatic demand water system pump has a built-in pressure switch, which automatically starts and stops when the faucet is opened and closed. Our tough design provides performance that you can rely on for years. Quality fresh water pumps you can trust with a 2 year warranty.

Features & Benefits

Positive displacement pump
Capable of supplying 2-5 fixtures
Internal bypass technology reduces cycling (22/42/43/51 series)
Can run dry
Quiet operation
Demand pump
Low amp draw
Open flow from 1.0 gpm/3.8lpm to 7.0 gpm/26.5 lpm
Pressure from 17 psi/1.2 bar to 70 psi/4.8 bar
Self priming up to 6 feet/1.8 m
Industry standard mount pattern
Completely rubber & iron mounting-base
Adjustable pressure switch
Easy connect fittings and strainers
Marine grade blocked wiring




23A Series Water Pump

FEATURES & BENEFITS

Open flow up to 1.5gpm/5.6lpm
Dry run capability
Max Self-priming up to 5 feet/1.5m
Waterproof grade IP54 with extra cover
On-demand long life pressure switch
Configurable reflux function
Adapt to a variety of scenarios
Multiple connector options
Ignition protected, CE, RoHS

PUMP


Max Recommended Temperature
140 °F (60 °C) Max.
Priming Capabilities
2 feet (0.6m) suction lift for 0.5 and 0.7gpm
5 feet (1.5m) suction lift for 1, 1.2 and 1.5gpm
Inlet/Outlet Ports
5/8" quick connector
Weight
1.54 lbs (0.7 kg)

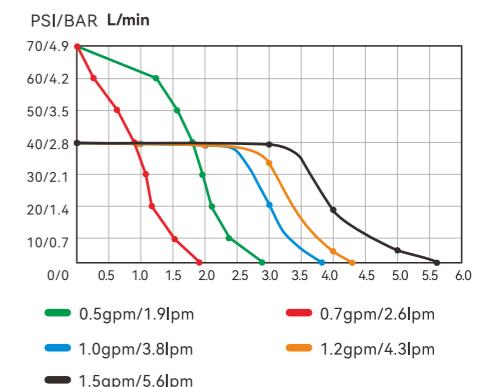

Standard Pump Configurations

Model	Voltage	GPM/LPM	Control Type	Amps	PSI/BAR	Valves	Diaphragm	Ports
SFDP1-010-040-23A	12V	1.0/3.8	Switch	3.8Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-010-040-23A	24V	1.0/3.8	Switch	2.0Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP1-012-040-23A	12V	1.2/4.5	Switch	4.2Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-012-040-23A	24V	1.2/4.5	Switch	2.2Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP1-015-040-23A	12V	1.5/5.6	Switch	4.5Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-015-040-23A	24V	1.5/5.6	Switch	2.5Max	40/2.8	EPDM	Santoprene	5/8" quick attach

Inquire about other configurations, or valve and diaphragm materials

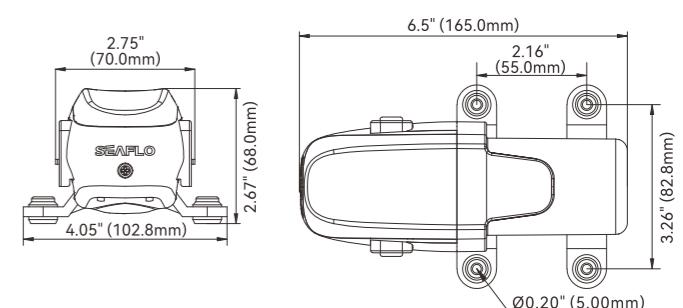



21 Series Water Pump



FEATURES & BENEFITS

Capable of supplying 1-2 fixtures
 Compact design
 On-demand pressure switch
 Adjustable pressure setting
 Can run dry
 Quiet operation
 Industry standard mounting pattern
 18 AWG, 13" (33 cm) long Leads

PUMP

Max Recommended Temperature
 110 °F (43 °C) Max.
Priming Capabilities
 4 feet (1.2 m) suction lift
Inlet/Outlet Ports
 $\frac{3}{8}$ " hose barb
 (Custom O-Ring Outlets available)
Weight
 1.25 lbs (0.57 kg)

PERFORMANCE

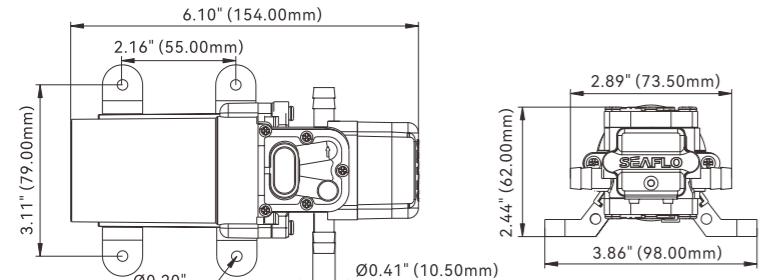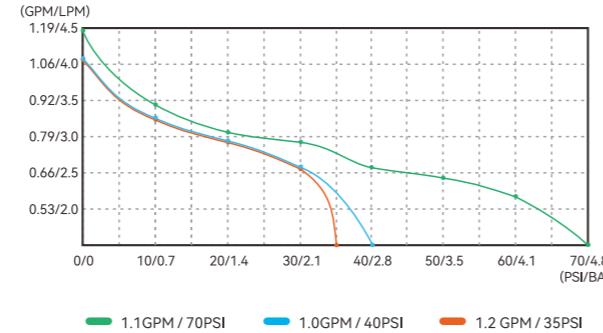


Standard Board Pump

Standard Pump Configurations

Model	Voltage	GPM/LPM	Control Type	Amps	PSI/BAR	Valves	Diaphragm	Ports
SFDP1-010-040-21	12 V	1.0/3.8	Switch	4.0 MAX	40/2.8	EPDM	Santoprene	$\frac{3}{8}$ " Barb (or Custom O-Ring)
SFDP2-010-040-21	24 V	1.0/3.8	Switch	2.0 MAX	40/2.8	EPDM	Santoprene	$\frac{3}{8}$ " Barb (or Custom O-Ring)
SFDP1-011-070-21	12 V	1.1/4.2	Switch	4.5 MAX	70/4.8	EPDM	Santoprene	$\frac{3}{8}$ " Barb (or Custom O-Ring)
SFDP1-012-035-21	12 V	1.2/4.5	Switch	4.0 MAX	35/2.4	EPDM	Santoprene	$\frac{3}{8}$ " Barb (or Custom O-Ring)
SFDP2-012-035-21	24 V	1.2/4.5	Switch	2.5 MAX	35/2.4	EPDM	Santoprene	$\frac{3}{8}$ " Barb (or Custom O-Ring)

Inquire about other configurations, or valve and diaphragm materials

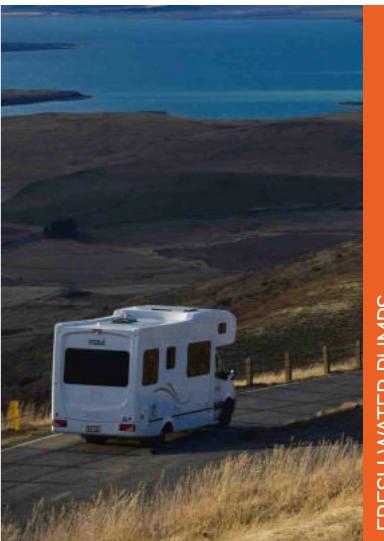

33 Series Water Pump



FEATURES & BENEFITS

Capable of supplying 2-3 fixtures
 Up to 3.0 GPM
 Self priming
 Run dry safe
 Quiet operation
 On-demand use
 Industry Standard mounting pattern
 Completely rubber mounting-base
 Adjustable pressure switch
 16 AWG, 4.5" (11.4 cm) long Leads

PUMP

Max Recommended Temperature
 140 °F (60 °C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 $\frac{1}{2}$ "-14 MNPT
Weight
 3.97 lbs (1.80 kg)


PERFORMANCE

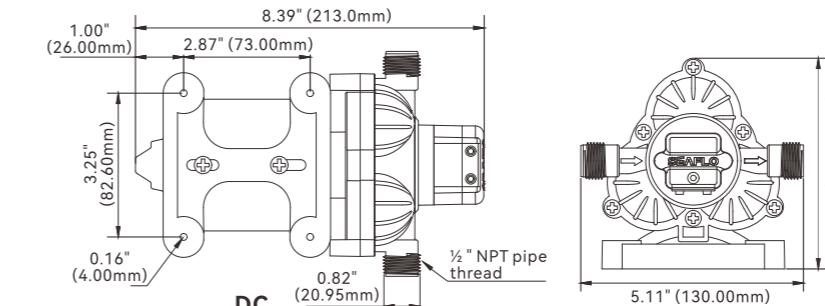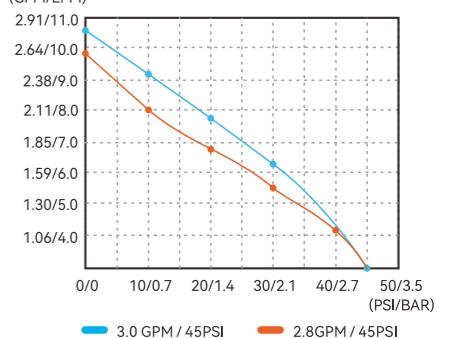

Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-018-020-33	12 V	Switch	1.8/6.8	20/1.4	3.5	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	2-Pin/Leads
SFDP1-020-020-33	12 V	Switch	2.0/7.57	20/1.4	4.5	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	2-Pin/Leads
SFDP1-024-030-33	12 V	Switch	2.4/9.07	30/2.1	5.0	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	2-Pin/Leads
SFDP1-028-045-33	12 V	Switch	2.8/10.6	45/3.1	7.5	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	2-Pin/Leads
SFDP2-028-045-33	24 V	Switch	2.8/10.6	45/3.1	4.0	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	2-Pin/Leads
SFDP1-030-045-33	12 V	Switch	3.0/11.3	45/3.1	8.5	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	2-Pin/Leads
SFDP2-030-045-33	24 V	Switch	3.0/11.3	45/3.1	4.0	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	2-Pin/Leads
SFDPA1-030-045-33	115 V	Demand	3.0/11.3	45/3.1	1.6	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	Leads/Plug
SFDPA2-030-045-33	220 V	Demand	3.0/11.3	45/3.1	0.8	EPDM	Santoprene	$\frac{1}{2}$ "-14 MNPT	Leads/Plug



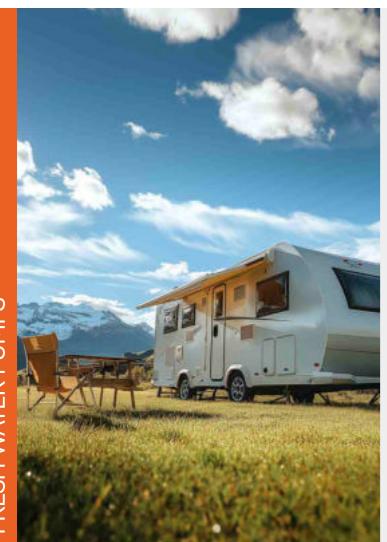

FRESH WATER PUMPS



41short-AC Pump



41 Series (short) Water Pump




FEATURES & BENEFITS

Up to 3.3 GPM
 Can supply up to 3 fixtures
 Quick-Connect fittings
 Self priming
 Run dry safe
 On-demand use
 Industry Standard mounting pattern
 Rubber mounting-feet
 Can be used for Fresh & Salt Water
 16 AWG, 4.5"(11.4 cm) long Leads

PUMP

Max Recommended Temperature
 140 °F (60 °C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 Quick Attach
Weight
 4.0 lbs (1.80 kg)

PERFORMANCE

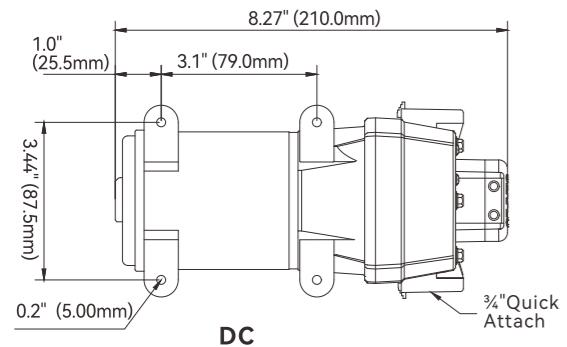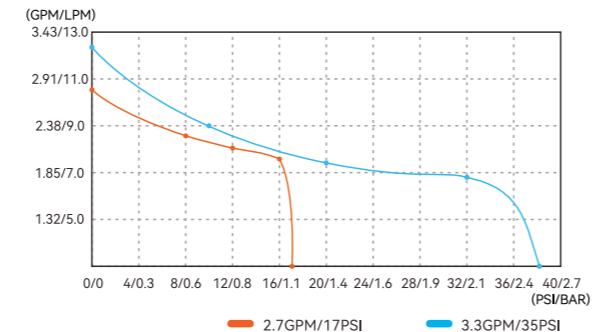

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-027-017-41	12 V	Switch & By pass	2.7/10.2	17/1.2	4.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-027-017-41	24 V	Switch & By pass	2.7/10.2	17/1.2	2.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-033-035-41	12 V	Switch & By pass	3.3/12.5	35/2.4	8.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-033-035-41	24 V	Switch & By pass	3.3/12.5	35/2.4	4.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDPA1-033-035-41	115 V	Demand & By pass	3.3/12.5	35/2.4	1.2	Viton	Santoprene	Quick Attach	Leads/Plug
SFDPA2-033-035-41	220 V	Demand & By pass	3.3/12.5	35/2.4	0.5	Viton	Santoprene	Quick Attach	Leads/Plug



41long-AC Pump



41 Series (long) Water Pump




FEATURES & BENEFITS

Up to 4.5 GPM
 Can supply up to 4 fixtures
 Quick-Connect fittings
 Self priming
 Run dry safe
 On-demand use
 Industry Standard mounting pattern
 Rubber mounting-feet
 Can be used for Fresh & Salt Water
 Adjustable pressure switch
 16 AWG, 4.5"(11.4 cm) long Leads

PUMP

Max Recommended Temperature
 140 °F (60 °C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 Quick Attach
Weight
 5.0 lbs (2.30 kg)

PERFORMANCE

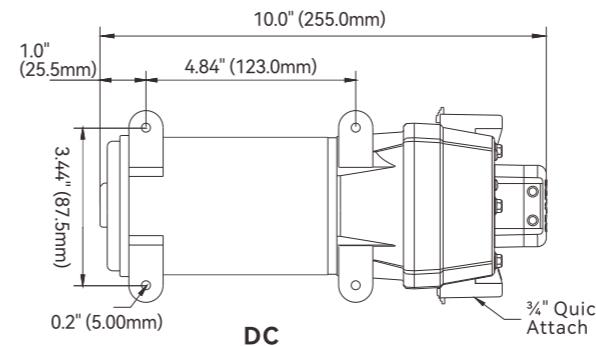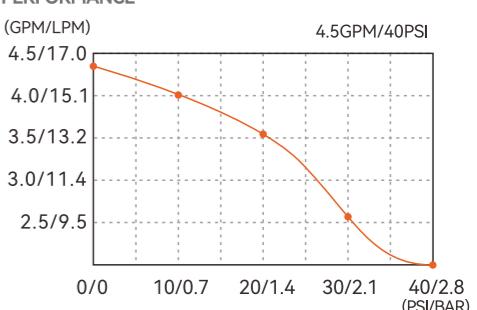

Standard Accessories



Standard Pump Configurations



Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-045-040-41	12 V	Switch & By pass	4.5/17.0	40/2.8	16.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-045-040-41	24 V	Switch & By pass	4.5/17.0	40/2.8	8.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDPA1-045-040-41	115 V	Demand & By pass	4.5/17.0	40/2.8	1.7	EPDM	Santoprene	Quick Attach	Leads/Plug
SFDPA2-045-040-41	220 V	Demand & By pass	4.5/17.0	40/2.8	0.9	EPDM	Santoprene	Quick Attach	Leads/Plug

42 Series (short) Water Pump
FEATURES & BENEFITS

Up to 3.0 GPM
 Self priming
 Run dry safe
 Quiet operation
 On-demand use
 Industry Standard mounting pattern
 Completely rubber mounting-base
 Internal bypass technology reduces cycling
 16 AWG, 9.4"(23.8 cm) long with

PUMP

Max Recommended Temperature
 140 °F (60 °C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 1/2"-14 MNPT
Weight
 4.1 lbs (1.90 kg)

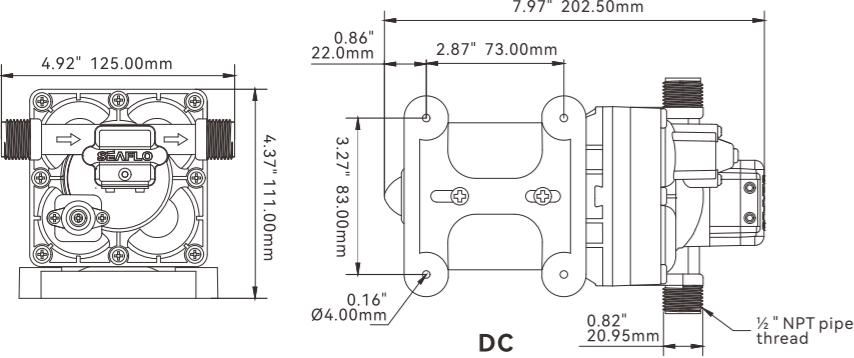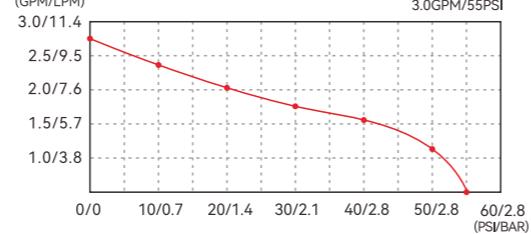PERFORMANCE

Standard Accessories

Standard Pump Configurations



Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-020-025-42	12 V	Switch & By pass	2.0/7.57	25/1.7	4.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-030-055-42	12 V	Switch & By pass	3.0/11.3	55/3.8	7.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-030-055-42	24 V	Switch & By pass	3.0/11.3	55/3.8	4.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDPA1-030-055-42	115 V	Switch & By pass	3.0/11.3	55/3.8	1.1	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug
SFDPA2-030-055-42	220 V	Switch & By pass	3.0/11.3	55/3.8	0.5	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug


42 Series (long) Water Pump
FEATURES & BENEFITS

Up to 5.0 GPM
 Self priming
 Run dry safe
 Quiet operation
 On-demand use
 Industry Standard mounting pattern
 Completely rubber mounting-base
 Internal bypass technology reduces cycling
 14 AWG, 9.4"(23.8 cm) long Leads

PUMP

Max Recommended Temperature
 140 °F (60 °C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 1/2" MNPT
Weight
 5.95 lbs (2.7 kg)

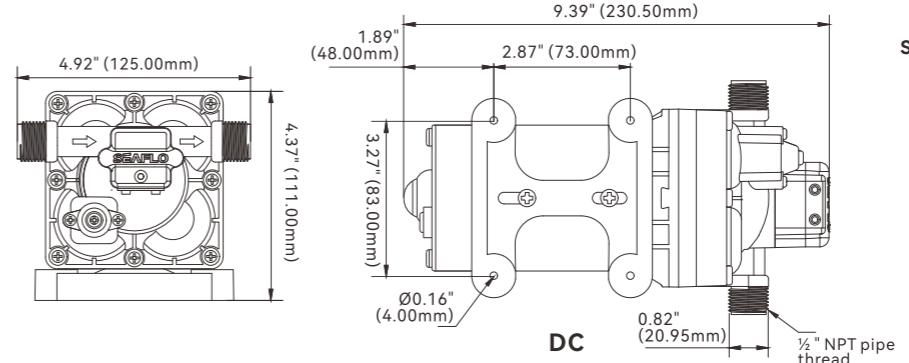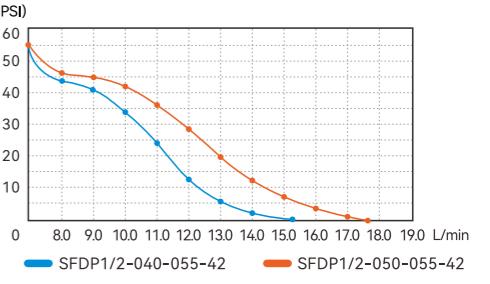PERFORMANCE

Standard Accessories

Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-040-035-42	12 V	Switch & By pass	4.0/15.1	35/2.4	12.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-040-035-42	24 V	Switch & By pass	4.0/15.1	35/2.4	6.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-050-055-42	24 V	Switch & By pass	5.0/18.9	35/2.4	7.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP1-040-055-42	12 V	Switch & By pass	4.0/15.1	55/3.8	14.00	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-040-055-42	24 V	Switch & By pass	4.0/15.1	55/3.8	7.00	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP1-050-055-42	12 V	Switch & By pass	5.0/18.9	55/3.8	15.00	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-050-055-42	24 V	Switch & By pass	5.0/18.9	55/3.8	7.50	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDPA1-040-055-42	115 V	Switch & By pass	4.0/15.1	55/3.8	1.80	EPDM	Santoprene	1/2" MNPT	Leads/Plug
SFDPA2-040-055-42	220 V	Switch & By pass	4.0/15.1	55/3.8	0.85	EPDM	Santoprene	1/2" MNPT	Leads/Plug



FRESH WATER PUMPS




55 Series Water Pump With Bypass

FEATURES & BENEFITS

Precise pressure control and stable performance
 Good sealing performance, waterproof and dustproof
 Low starting pressure, reduces cycling
 Good heat dissipation
 Longer pump life
 Can supply up to 4 fixtures
 Run dry capable for normal workloads
 Very quiet operation
 On-demand combine with by-pass
 Fresh water or salt water available
 16 AWG, 9"(22.8 cm) long Leads

PUMP

Max Recommended Temperature
 140 °F (60 °C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 1/2" MNPT
Weight
 5.9 lbs (2.68 kg)

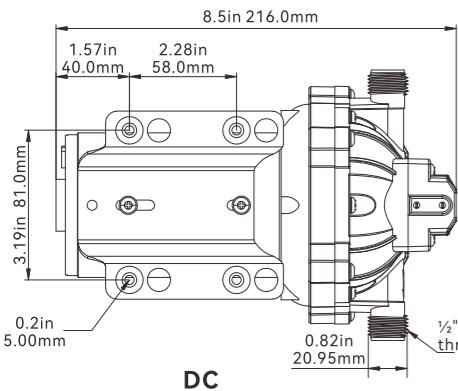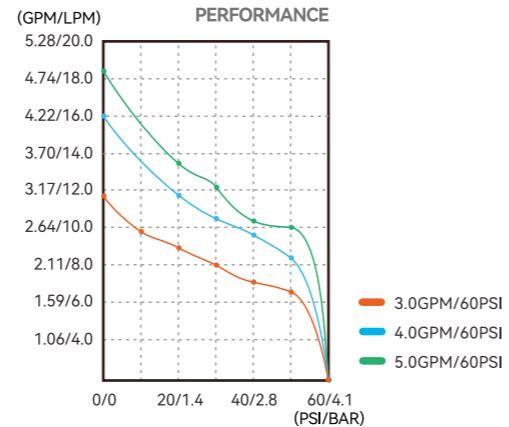

Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-040-060-55	12V	Switch & By Pass	4.0/15.0	60/4.2	14.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-040-060-55	24V	Switch & By Pass	4.0/15.0	60/4.2	7.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-050-060-55	12V	Switch & By Pass	5.0/18.9	60/4.2	17.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-050-060-55	24V	Switch & By Pass	5.0/18.9	60/4.2	8.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDPA1-050-060-55	115V	Switch & By Pass	5.0/18.9	60/4.2	2.56	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug
SFDPA2-050-060-55	220V	Switch & By Pass	5.0/18.9	60/4.2	1.28	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug



NEW



FRESH WATER PUMPS

56C Series Variable Speed Smart Pump


FEATURES & BENEFITS

- Variable speed technology
- Motor speed adjusts to water needs
- Capable of sustained low voltage operation
- Waterproof grade IPX5
- Run dry safe, long service life
- Strong suction, suction lift up to 1.8m
- CE, UKCA, RoHS, REACH, PAHs
- Quiet operation, bypass technology reduces cycling
- 5-chamber diaphragm pump operates more stably and smoothly


PUMP

Max Recommended Temperature
 140 °F (60 °C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 1/2" MNPT
Weight
 6.57 lbs (2.98 kg)

PERFORMANCE

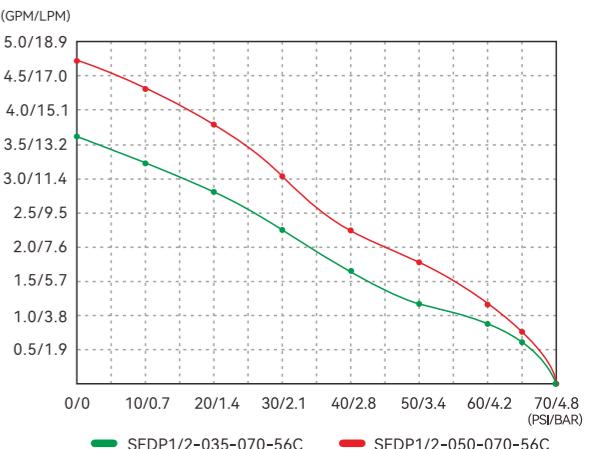

Standard Accessories

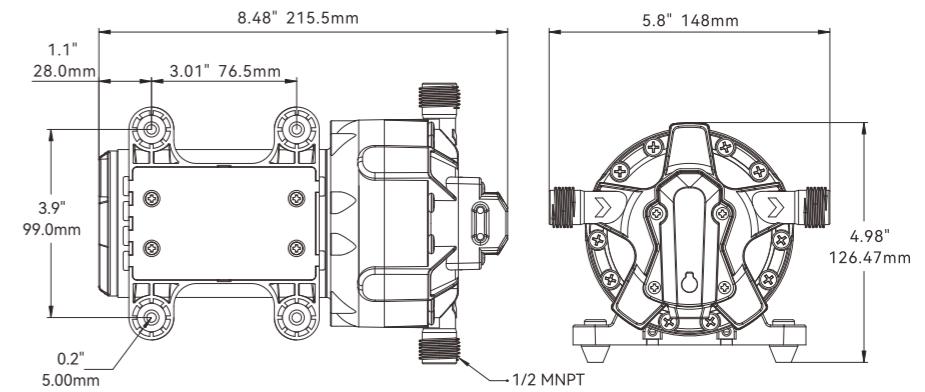

Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-035-070-56C	12V	Variable Speed	3.5/13.2	70/4.8	7.5	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-035-070-56C	24V	Variable Speed	3.5/13.2	70/4.8	4.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP1-050-070-56C	12V	Variable Speed	5.0/18.9	70/4.8	10.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-050-070-56C	24V	Variable Speed	5.0/18.9	70/4.8	5.5	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads



33 Series Economic Water Pressure System

3.0 GPM/11.3LPM Pump with Integrated Accumulator Tank


FEATURES & BENEFITS

Powerful 3.0 gallons/11.3 litres per minute of flow
 Ultra quiet with constant and steady flow
 Superior self-priming capabilities
 Powerful enough to supply up to 3 fixtures
 Built-in adjustable pressure switch
 Easy pre-assembled installation
 Heavy-duty, corrosion resistant motor
 Capable of being run dry without damage
 Can be fitted to new or existing systems

PUMP

Max Recommended Temperature
 140°F(60°C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 1/2"MNPT
Weight
 7.1 lbs (3.2 kg)

PERFORMANCE

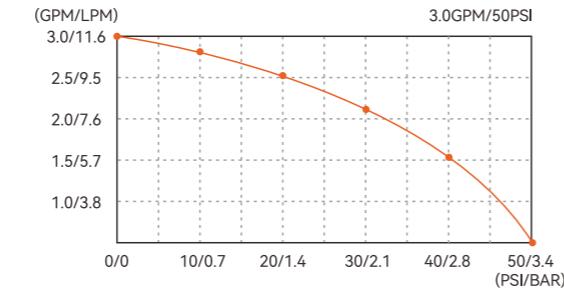

42 Series Quietest Water Pressure System

3.0 GPM/11.3LPM Pump with Integrated Accumulator Tank



FEATURES & BENEFITS

Powerful 3.0 gallons/11.3 litres per minute of flow
 Ultra quiet with constant and steady flow
 Superior self-priming capabilities
 Powerful enough to supply up to 3 fixtures
 Built-in adjustable pressure switch
 Easy pre-assembled installation
 Heavy-duty, corrosion resistant motor
 Capable of being run dry without damage
 Can be fitted to new or existing systems


PUMP

Max Recommended Temperature
 140°F(60°C) Max.
Priming Capabilities
 6 feet (1.8 m) suction lift
Inlet/Outlet Ports
 1/2"MNPT
Weight
 7.28 lbs (3.3 kg)

PERFORMANCE

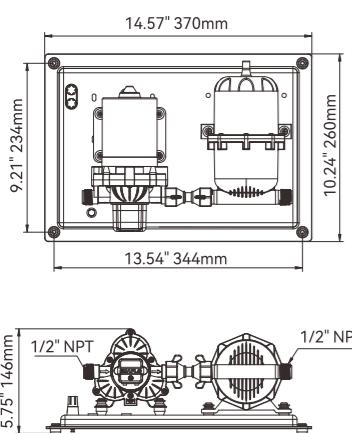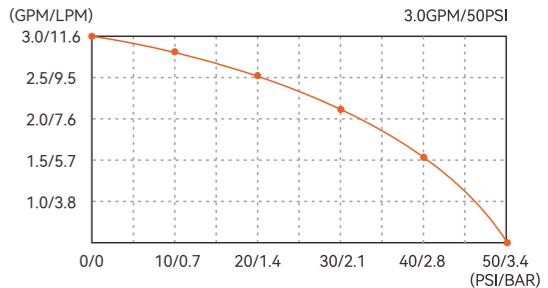

Standard Accessories

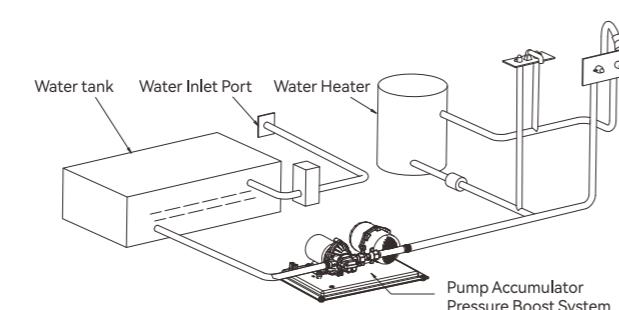

Standard Pump Configurations

Model	Tank Volume	Voltage	Control Type	GPM/LPM	Pressure On (PSI/BAR)	Pressure Off (PSI/BAR)	Max Draw(A)	Ports	Wire Connections
SFWSK1-030-045-002	0.75 L	12 V	Switch	3.0 / 11.3	35 / 2.4	45 / 3.1	11.0	1/2"MNPT	2-Pin/Leads
SFWSK2-030-045-002	0.75 L	24 V	Switch	3.0 / 11.3	35 / 2.4	45 / 3.1	5.5	1/2"MNPT	2-Pin/Leads

Standard Pump Configurations

Model	Tank Volume	Voltage	Control Type	GPM/LPM	Pressure On (PSI/BAR)	Pressure Off (PSI/BAR)	Max Draw(A)	Ports	Wire Connections
SFWSK1-030-055-002	0.75 L	12 V	Switch & By Pass	3.0 / 11.3	45 / 3.1	55 / 3.8	7.5	1/2"MNPT	2-Pin/Leads
SFWSK2-030-055-002	0.75 L	24 V	Switch & By Pass	3.0 / 11.3	45 / 3.1	55 / 3.8	4.0	1/2"MNPT	2-Pin/Leads

Pressurized Accumulator Tank 0.75L/1L

Accumulator tanks hold a reservoir of air and water down stream from the pump. The air acts as a cushion, absorbing pump and pressure fluctuations, smoothing the flow and making the system quieter. Accumulators allow the pump to reach shut-off pressure more smoothly which reduces the on/off cycle which gives better control of hot water delivery.

FEATURES & BENEFITS

Smoother flow, quieter water systems.
 Internal rubber membrane eliminates maintenance and allows universal mounting.
 Better control of hot water temperatures.

Simply fitted to new or existing systems.
 Longer pump life, lower battery drain.
 Snap-in port fittings.

Standard Accessories:



Optional Accessories:




51F001 x 2



51F004


51F005

0.75 L

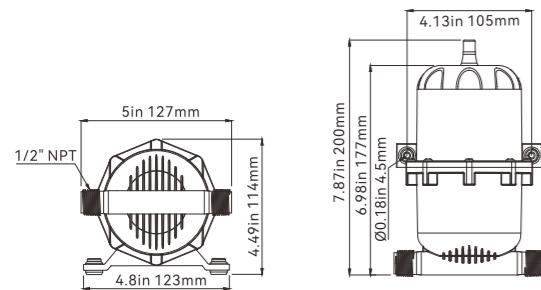

Product Specifications

Model	Internal Volume	Pre-charge Pressure	Max Operating Pressure	Air Fill Valve	Inlet/Outlet Dia	Weight	Dimensions
SFAT-075-125-01	0.75 L 23.5 OZ	10 PSI 0.7 BAR	125 PSI 8.6 BAR	standard automotive style tire valve	1/2" MNPT	360 g	8.1" x 4.6" 205mm x 116mm

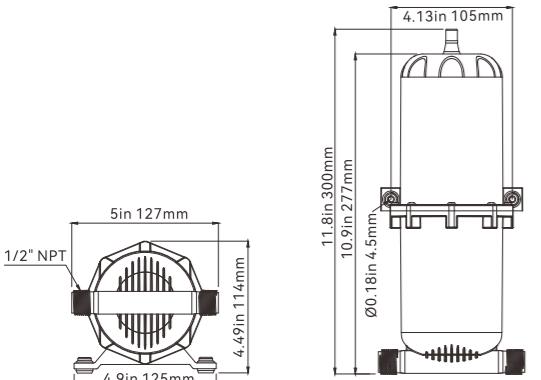


Product Specifications

Model	Internal Volume	Pre-charge Pressure	Max Operating Pressure	Air Fill Valve	Inlet/Outlet Dia	Weight	Dimensions
SFAT-100-125-01	1.0 L 33.8 OZ	10 PSI 0.7 BAR	125 PSI 8.6 BAR	standard automotive style tire valve	1/2" MNPT	660 g	12" x 4.6" 300mm x 114mm

NEW



Kraft Box

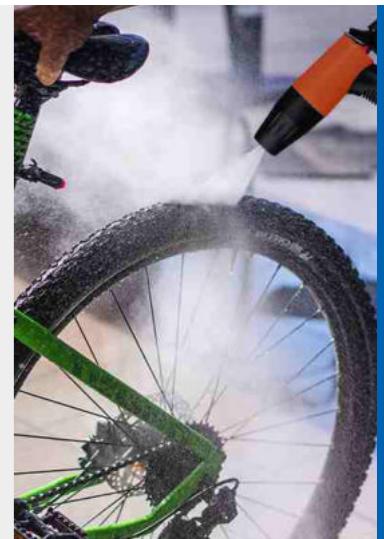

WASHDOWN PUMP KITS

56 Series Portable Cleaning Kit




FEATURES & BENEFITS

1/2" NPTF connector can be directly connected to the pipe or used with a quick coupling
 Pump station integrated design, easy to use
 Advanced IPX6 rating waterproof outer box
 High-power water pump, flow up to 5.0GPM
 Automatic shut-off pressure switch
 Quiet operation, Capable of dry running
 With 17' (5.2m) UV-protected coiled hose coil and adjustable sprayer

PUMP


Liquid temperature
 140 °F (60 °C) Max.
Priming Capabilities
 5 feet (1.5 m) suction lift
Max Pressure
 70 PSI (4.8 BAR)
Weight
 11.2 lbs (5.1 kg)

Standard Accessories

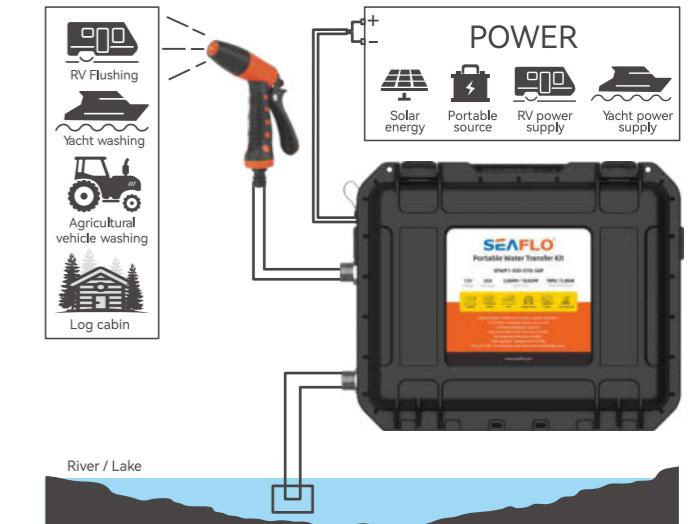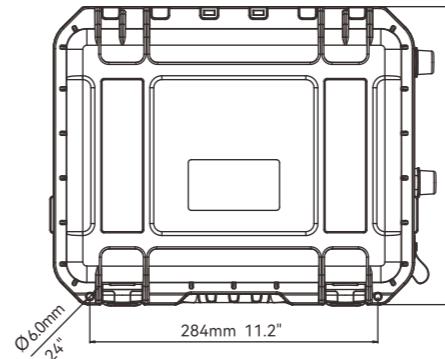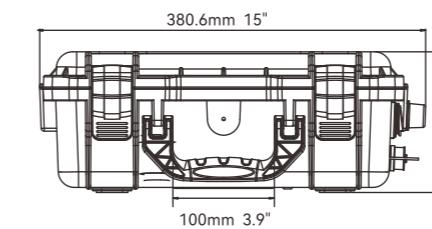

Standard Pump Configurations

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-050-070-56P	12V	5.0 / 18.9	Demand & By pass	20.0	70 / 4.8	EPDM	Santoprene	1/2" NPTF	Waterproof connector

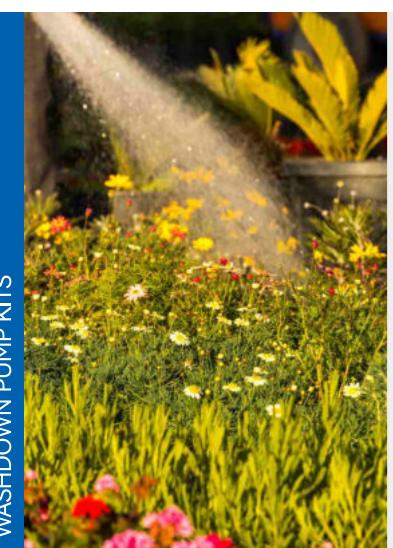
NEW
WASHDOWN PUMP KITS

56 Series Portable Water Transfer Kit

FEATURES & BENEFITS

1/2" NPTF can connector be directly connected to the pipe or used with a quick coupling
 Pump station integrated design, easy to use
 Advanced IPX6 rating waterproof outer box
 High-power water pump, flow up to 5.0GPM
 Automatic shut-off pressure switch
 Quiet operation, Capable of dry running



PUMP

Liquid temperature 140 °F (60 °C) Max.
 Priming Capabilities 5 feet (1.5 m) suction lift
 Max Pressure 70 PSI (4.8 BAR)
 Weight 9.9 lbs (4.5 kg)

Standard Accessories



G1/2" Connector 51F011 9.8' (3m) power cord assembly with battery clip SFWP-30-20A

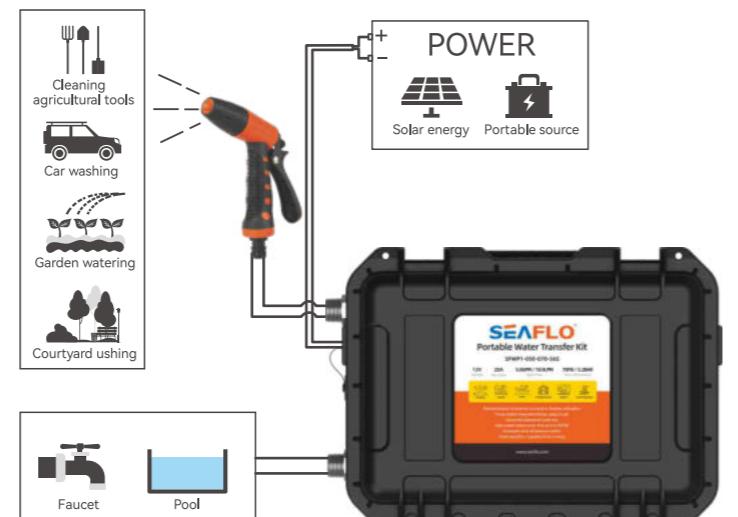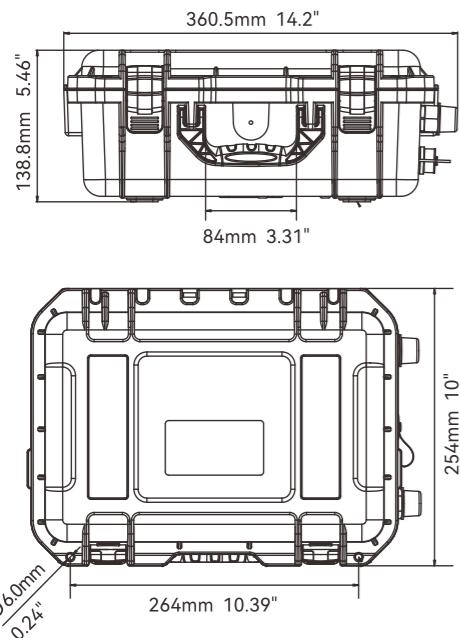
Standard Pump Configurations

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-050-070-56S	12V	5.0 / 18.9	Demand & By pass	20.0	70 / 4.8	EPDM	Santoprene	1/2" NPTF	Waterproof connector

Outdoor Camping Shower


NEW

FEATURES & BENEFITS

- 8L portable outdoor camping shower
- Safety valve design, self-releasing safety
- Super bowl design for easy filling
- With shoulder strap for carrying
- Thickened base makes the product more stable, not easy to damage
- 7 spray water column modes, freely adjustable: mild spray, flat spray, cone spray, atomized spray, powerful spray, container filling, multi-water column jet.
- Multi-functional: outdoor shower, garden watering, vehicle cleaning, fruit washing, etc.



Model	Capacity	Tube length	Material
SFOCS1-08-01	8L	1.3m / 4.27ft	PP

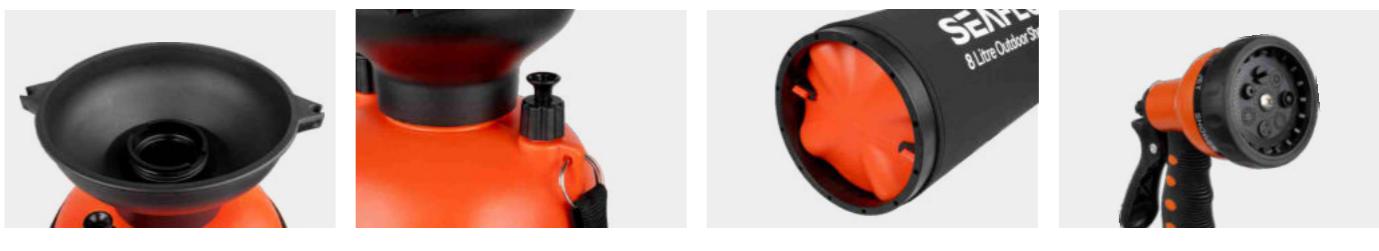OUTDOOR CAMPING SHOWER


Portable Shower Pump

NEW

FEATURES & BENEFITS

- Provide one 2AH battery and a charging cable
- The bottom of the pump is designed with a suction cup for better fixation
- The battery and shower are equipped with corresponding fixing brackets for free your hands
- The shower head and hose adopt universal quick connection, which is easy to assemble and operate
- Shower comes with water filter to ensure the water is clean and protect the shower head from being clogged


Standard Pump Configurations

Model	Flow rate	Operating voltage	Operating Current	Battery capacity	Foldable Bucket
SFPSP5-L010-01	10LPM	3.2~4.2V	2.5~3.5A	2AH	No
SFPSP5-L010-02	10LPM	3.2~4.2V	2.5~3.5A	2AH	Yes



10L Foldable Bucket (Optional)



NEW

FEATURES & BENEFITS


- Quiet and vibration less operation
- Completely submersible
- With automatic ventilation
- Suitable for short dry runs
- Small size and light weight
- Easy to clean
- LFGB food grade certification




BILGE PUMPS

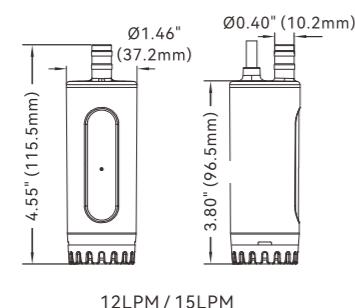Low Voltage Submersible Pump 02 Series 12/15/18/21/25 LPM


Model	SFSP1-L012-02	SFSP1-L015-02
Voltage	12V	12V
Max Amps	5.5A	6.0A
Flow rate	12 LPM	15 LPM
Bar	0.8 bar	1.0 bar
Head	8m / 26'	11m / 36'
Wire Lead	1 m / 3'	1 m / 3'
Features	Ventilation	Ventilation

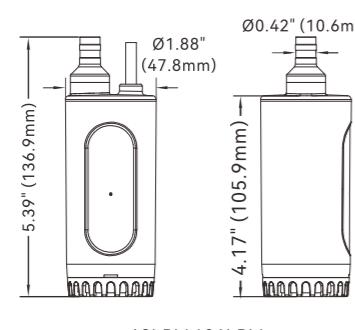

Model	SFSP1-L018-02	SFSP1-L021-02
Voltage	12V	12V
Max Amps	8.0 A	10.0 A
Flow rate	18 LPM	21 LPM
Bar	1.2 bar	2.1 bar
Head	12m / 39'	16m / 52'
Wire Lead	1 m / 3'	1 m / 3'
Features	Ventilation, Check valve, Dry running protection	

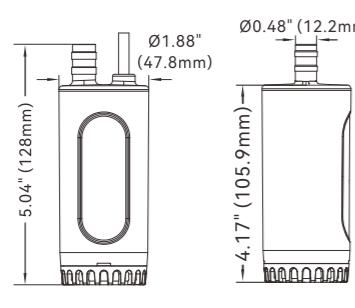

Model	SFSP1-L025-02
Voltage	12V
Max Amps	10.0 A
Flow rate	25 LPM
Bar	2.1 bar
Head	16m / 52'
Wire Lead	1 m / 3'
Features	Ventilation, Check valve, Dry running protection

Low Voltage Submersible Pump 01 Series 12/16 LPM
FEATURES & BENEFITS



- Pumps up to 18 vertical feet
- 1/2" Outlet
- Ideal for backup battery sump
- Quiet and vibrationless operation
- Completely submersible
- 18 AWG, 1 m long Leads

PUMP



- Priming Capabilities**
 Flooded suction
- Power**
 2.8 amps max current draw
- Flow**
 3.2 & 5.0 GPM Models Available

MOTOR


- Type**
 Compact, efficient, long life motor
- Temperature Limits**
 110 °F (43 °C) Max.
- Duty Cycle**
 Intermittent (30 minutes)

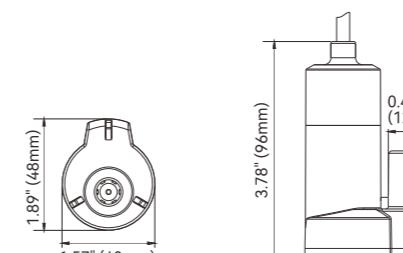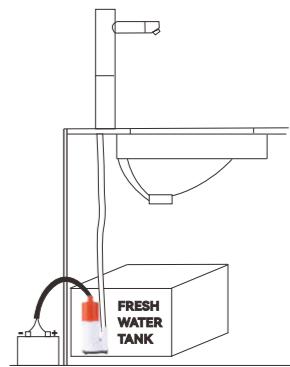

Standard Pump Configurations

Model	Voltage	MaxAmps	Flow rate	Bar	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFSP1-L012-01	12V	2.0 A	12 LPM	0.6 bar	5 m / 16.4'	1 m / 3'	1/2" (12 mm)	0.16 / 0.18 kg

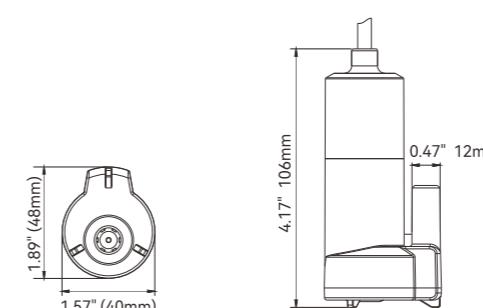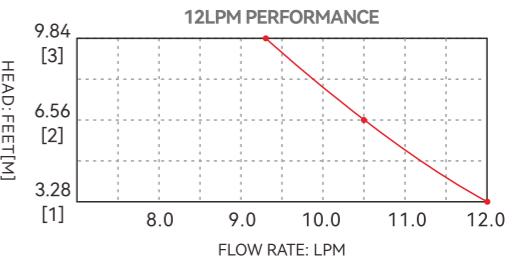
Standard Pump Configurations

Model	Voltage	MaxAmps	Flow rate	Bar	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFSP1-L016-01	12V	4.5 A	16 LPM	0.6 bar	6 m / 19.7'	1 m / 3'	1/2" (12 mm)	0.24 / 0.26 kg

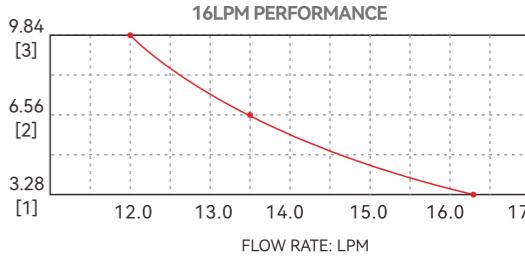

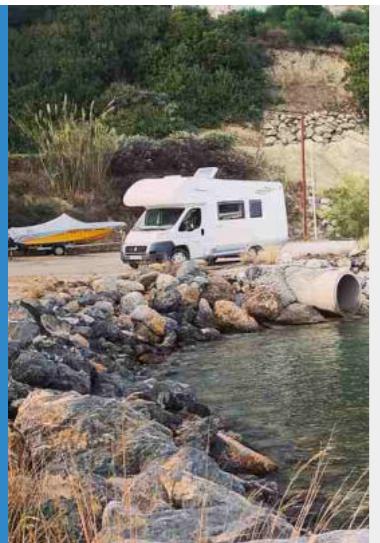

BILGE PUMPS






Blister

Submersible And Line Pump 200 GPH

FEATURES & BENEFITS

- Able to pump 80 °C sea water
- Able to run about 20 minutes
- Portable to carry on
- Easy installation
- Intermittent duty

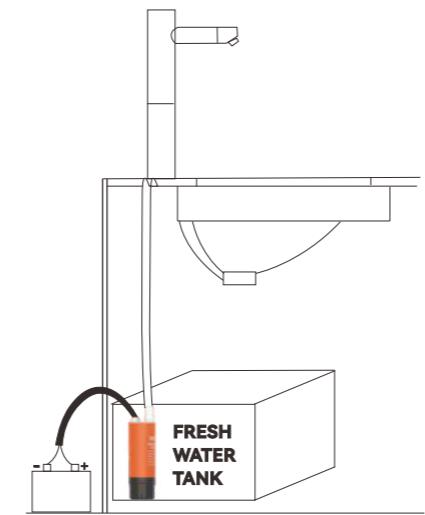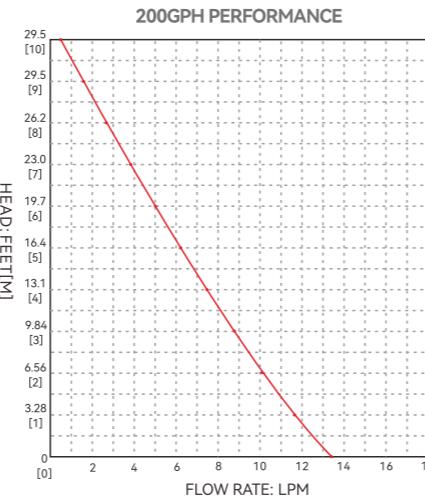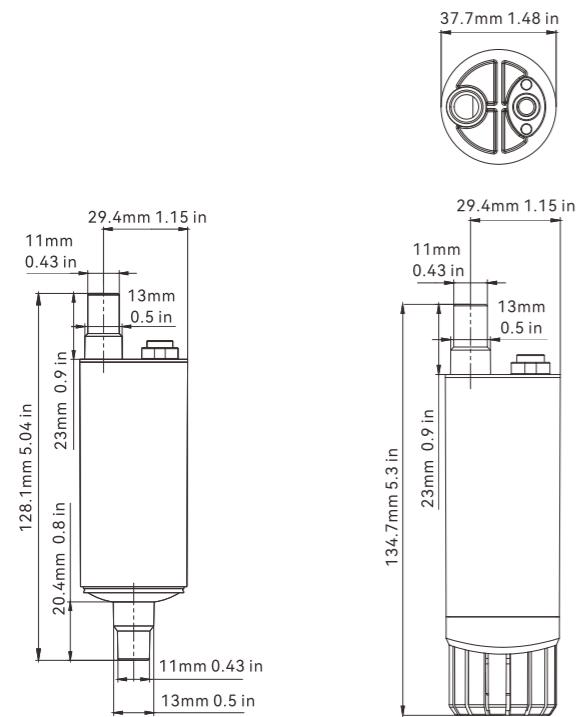



Standard Pump Configurations

Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G200-03B	200 GPH	12V	4.5 A	7.5 A	5 m/16.4'	1 m/ 3'	2/5" / 1/2"

Submersible And Line Pump 280/500 GPH


FEATURES & BENEFITS

- Able to pump 40 °C diesel, 80 °C sea water
- Able to run about 20 minutes
- Portable to carry on
- Easy installation
- Intermittent duty
- "A" refers to 5m leads with clip, "B" refers to 1m leads

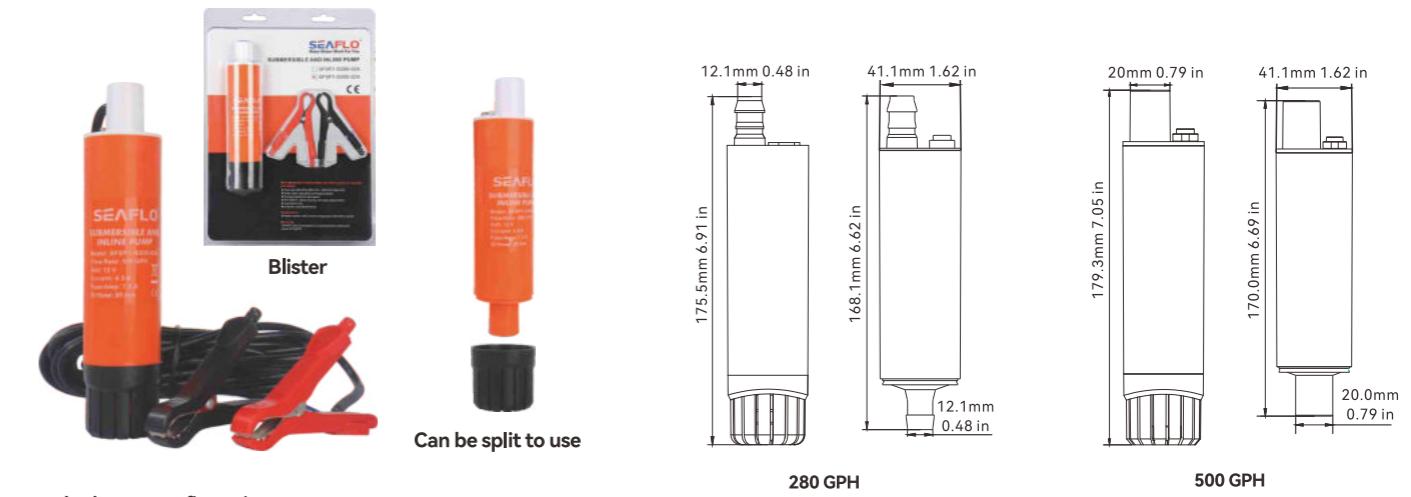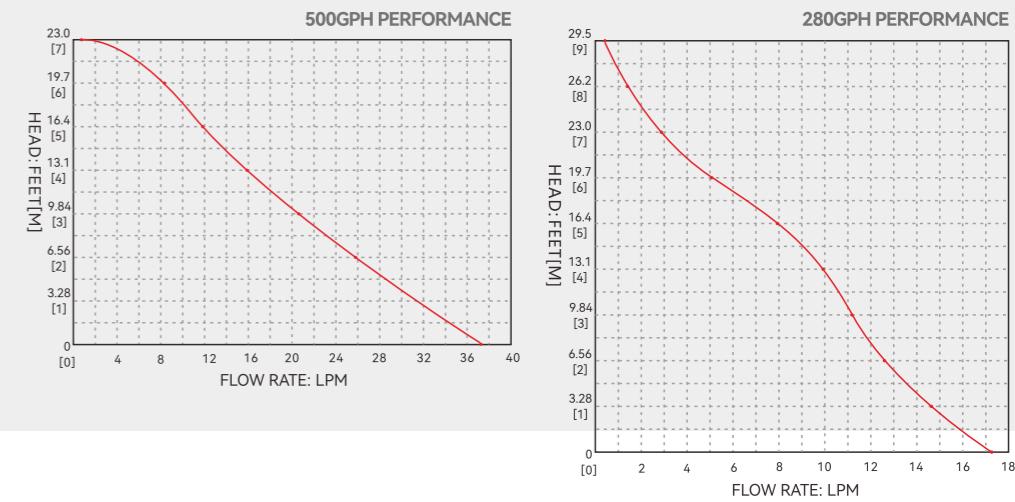


standard pump configurations

Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G280-02A	280 GPH	12V	4.5A	7.5A	7 m/23'	5 m/16'	1/2"
SFSP1-G500-02A	500 GPH	12V	4.5A	7.5A	7 m/23'	5 m/16'	3/4"


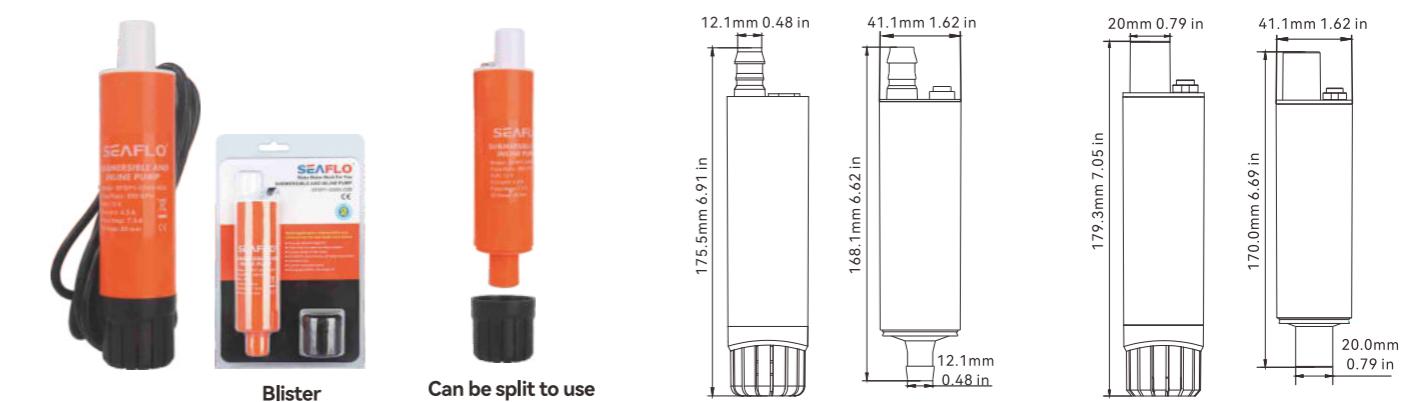


standard pump configurations

Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G280-02B	280 GPH	12V	4.5A	7.5A	7 m/23'	1 m/3'	1/2"
SFSP1-G500-02B	500 GPH	12V	4.5A	7.5A	7 m/23'	1 m/3'	3/4"

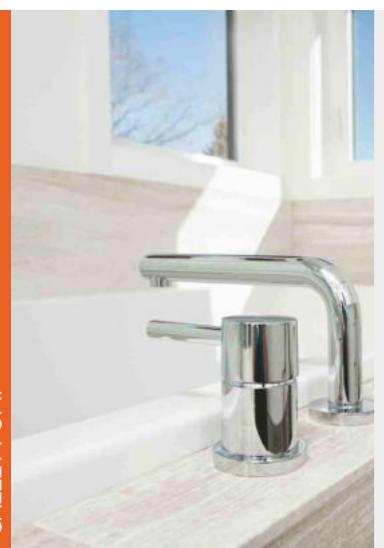GALLEY PUMP

NEW
Galley Pump
FEATURES & BENEFITS

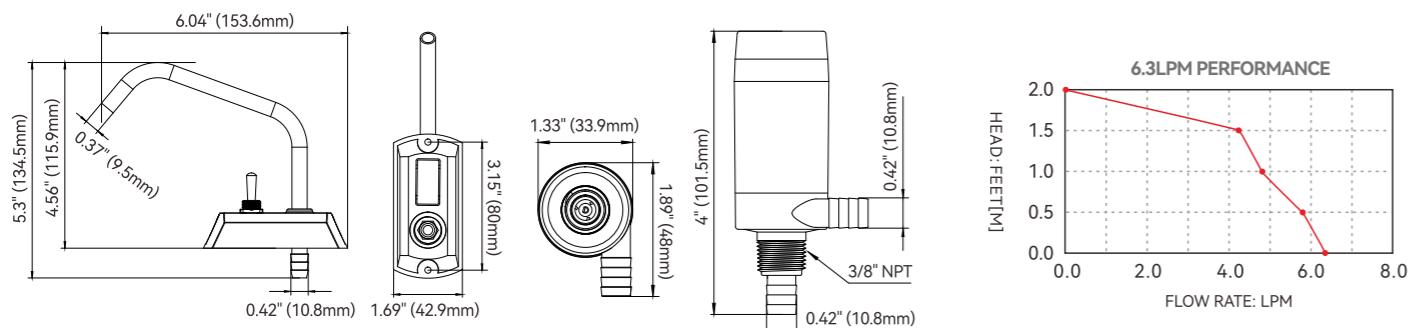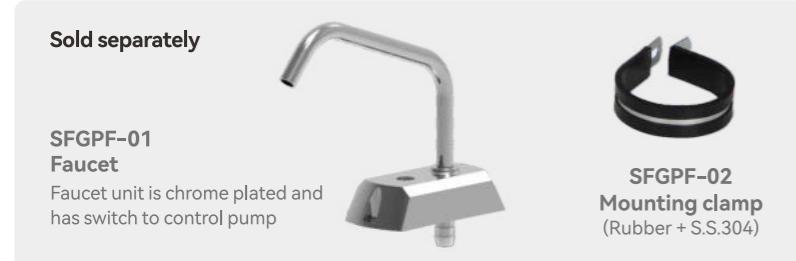
Galley pump complete with tap, mounting clamp
 Suitable for pumping fresh water out of a tank to the provided faucet unit
 Not self-priming - needs to be mounted below water tank level
 Faucet unit is chrome plated and has switch to control pump
 Compact size and easy installation


Standard Pump Configurations

Model	Voltage	Flow rate	Current	Head	Hose Dia.	With tap
SFGP1-G100-01	12 V	100GPH / 6.3LPM	1.2 A	6.6ft / 2m	3/8" (10mm)	No
SFGP2-G100-01	24 V	100GPH / 6.3LPM	0.6 A	6.6ft / 2m	3/8" (10mm)	No
SFGP1-G100-01K	12 V	100GPH / 6.3LPM	1.2 A	6.6ft / 2m	3/8" (10mm)	Yes
SFGP2-G100-01K	24 V	100GPH / 6.3LPM	0.6 A	6.6ft / 2m	3/8" (10mm)	Yes

Foot Galley Pump
NEW
FEATURES & BENEFITS


Foot operated diaphragm pump
 Self-priming and dry run capability
 4 gallons per minute for a reliable water supply
 Marine-grade durable materials
 Simple to use, easy to install

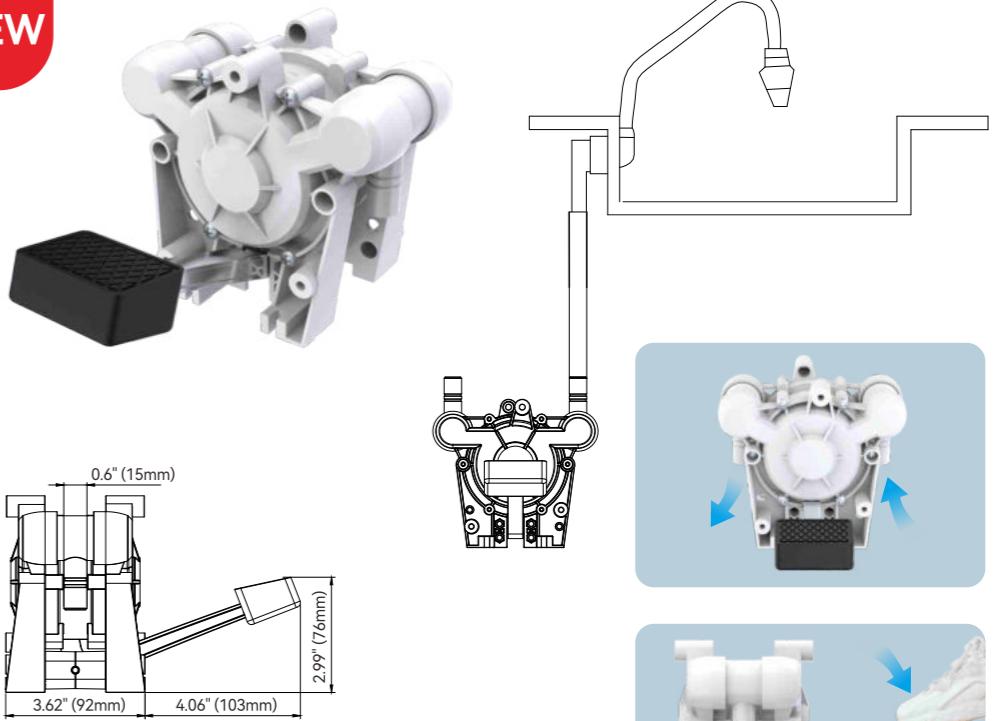


Model	Flow rate	Suction lift	Hose Dia.
SFGP-G240-03	240GPH / 908LPH	6ft / 2m	1/2" (12mm)

Hand Galley Pump
NEW
FEATURES & BENEFITS

Easy to use, rotate the handle back and forth to pump water
 Built-in check valve prevents water back flow
 Self-priming to 8.2ft(2.5m)
 Can pump fresh or salt water

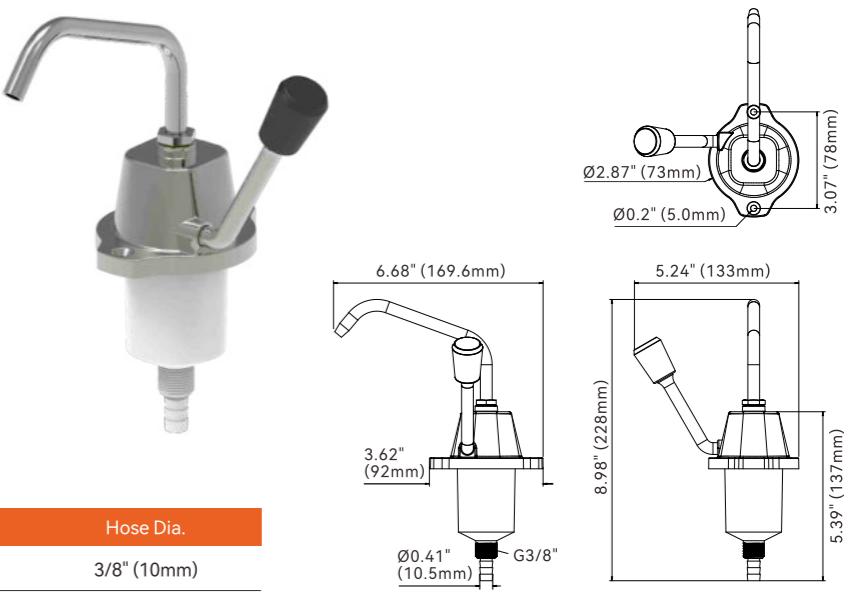

Model	Flow rate	Suction lift	Hose Dia.
SFGP-G60-02	60GPH / 228LPH	8.2ft / 2.5m	3/8" (10mm)

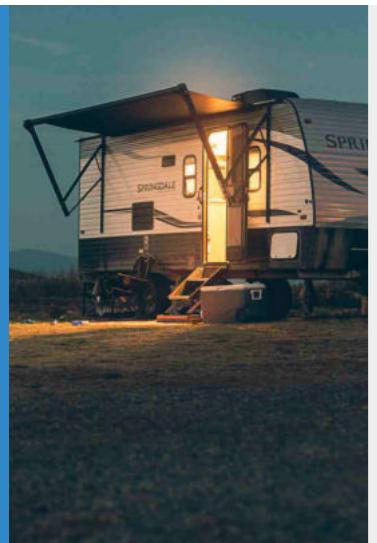

SHOWER SUMP PUMP SYSTEM



Color Box

Shower Sump Pump System 600/750 GPH

FEATURES & BENEFITS




- Removable mesh filter allows easy cleaning
- Clear screw-down cover
- Check valve on outlet
- Ignition protected
- Handles waste water from more than one tapping point
- Easy installation
- Multiple inlet ports for versatile usage
- 18 AWG, 1 m long Leads

MOTOR

- Type
Sealed, efficient, long life motor

Duty Cycle

Intermittent

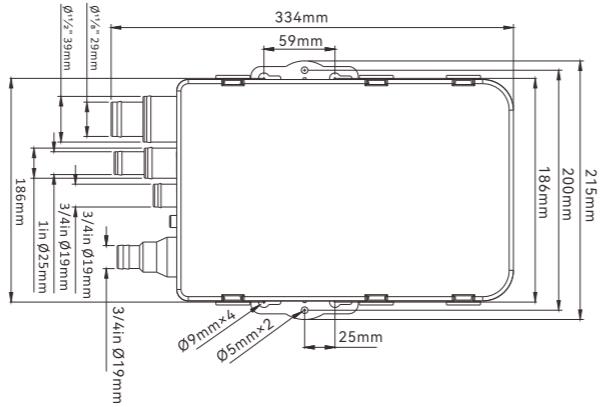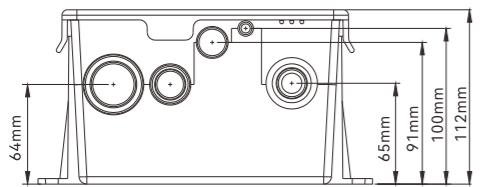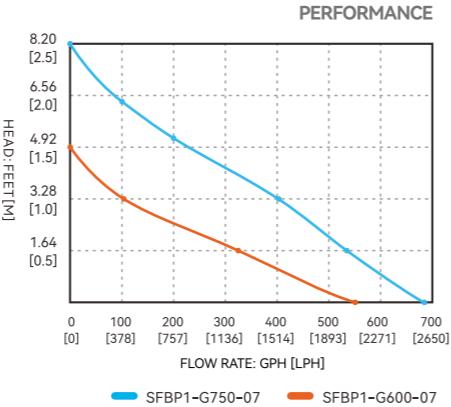

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-07	600 GPH	12 V	2.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.35 kg
SFBP2-G600-07	600 GPH	24 V	1.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.36 kg
SFBP1-G750-07	750 GPH	12 V	3.0 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.37 kg
SFBP2-G750-07	750 GPH	24 V	1.6 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.38 kg

Macerator Pump 01 Series



FEATURES & BENEFITS

- Completely new design
- Sealed motor
- Easy reach knob in case of clogs
- Run Dry for short periods of time
- New 4-blade design
- Thermally Protected
- Ignition Protected

PUMP

- Liquid Temperature
140 °F (60 °C) Max.
Power
12 amps max current draw
Weight
4.9 lbs (2.24 kg)

- Inlet/Outlet Ports**
Inlet:
1.5" (39 mm) Hose Barb
1.5" (39 mm) Threaded Fitting
Outlet:
1" Hose Barb

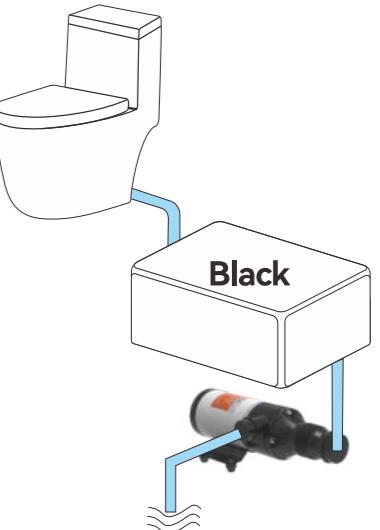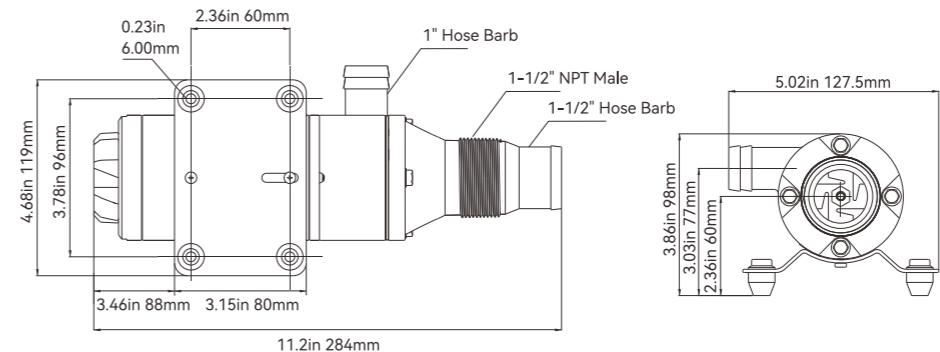

Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Ports	Lead	Molded	MaxDraw(A)
SFMP1-120-01	12 V	12/45.0	Rubber & Copper	Inlet 1-1/2" Barb/1-1/2" NPT Outlet 1" Barb	Yes	N/A	12.0
SFMP2-120-01	24 V	12/45.0	Rubber & Copper	Inlet 1-1/2" Barb/1-1/2" NPT Outlet 1" Barb	Yes	N/A	6.0

SHOWER SUMP PUMP SYSTEM



MACERATOR PUMP



MACERATOR PUMP



02 Series

Macerator Pump 02 Series

FEATURES & BENEFITS



- Fresh water rinse capabilities
- Connects directly to the RV waste outlet
- Impeller can be loosened with a end back knob
- Ability to dump longer distances
- Easy clean up and storage
- New four blades for reducing clogging
- With manual blending function for emergency

PUMP

- Liquid Temperature: 140 °F (60 °C) Max.
- Power: 12 amps max current draw
- Weight: 5.1 lbs (2.3 kg)

Inlet/Outlet Ports

- Inlet: 3" (75 mm) RV Connector
- Outlet: 1" Hose Barb

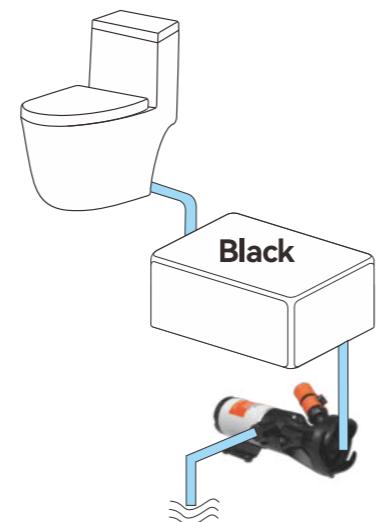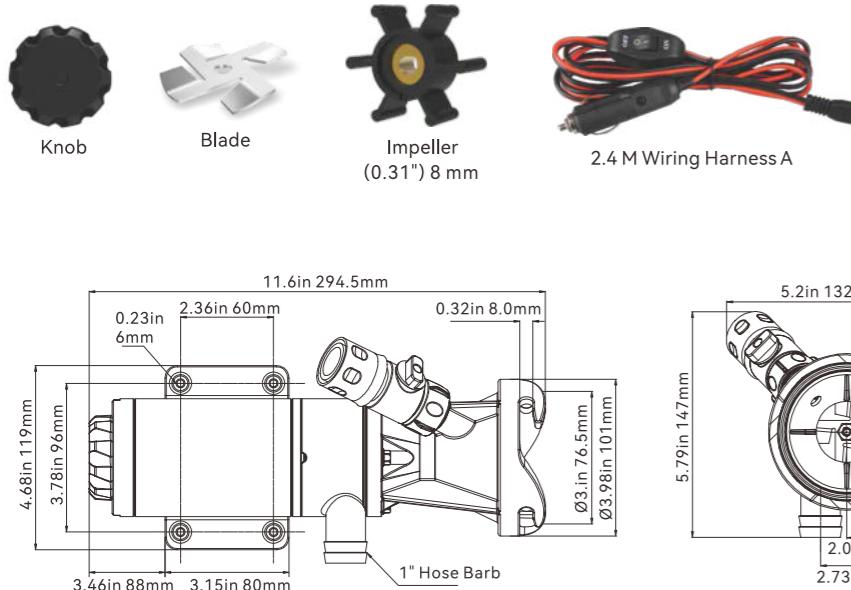

Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Ports	Max Draw(A)
SFMP1-120-02	12 V	12/45.0	Rubber & Copper	3" (75 mm) RV Connector 1" Hose Barb	12.0
SFMP2-120-02	24 V	12/45.0	Rubber & Copper	3" (75 mm) RV Connector 1" Hose Barb	7.0

NEW



Kraft Box



MACERATOR PUMP



Portable Macerator Pump Kit

FEATURES & BENEFITS

- Connects directly to the RV waste outlet
- Garden hose discharge port
- Fresh water rinse capabilities
- Remote hand held on/off switch
- Ability to dump longer distances
- Ability to drain holding tanks at home
- Easy clean up and storage
- Rugged portable storage case
- Water inlet isolation cover to isolate odor
- Ignition protection

PUMP

- Liquid Temperature: 140 °F (60 °C) Max.
- Power: 12 amps max current draw

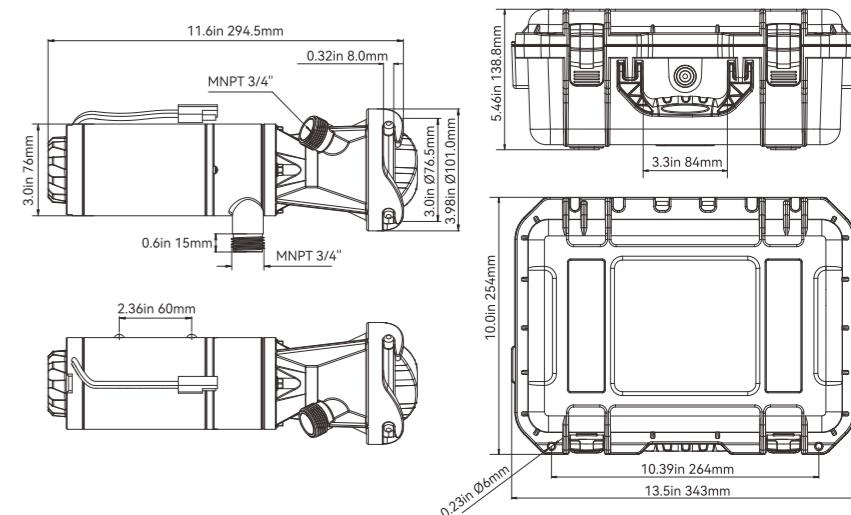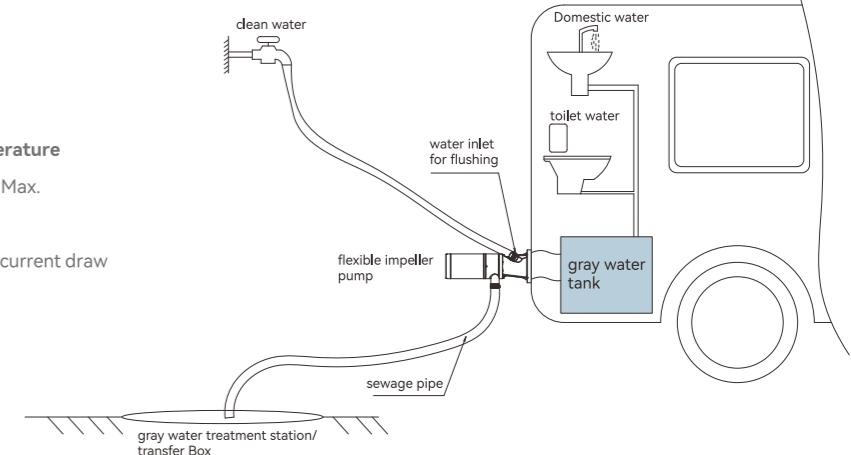

Accessories



Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Ports	Max Draw(A)
SFMP1-120-04	12 V	12/45.0	Rubber & Copper	3" (75 mm) RV Connector 3/4" MNPT	15.0
SFMP2-120-04	24 V	12/45.0	Rubber & Copper	3" (75 mm) RV Connector 3/4" MNPT	7.0



Deluxe Flush Electric Toilet
SFMTE1-05

RV Toilet
SFRTPH-01-01

Economy Portable Toilet
SFPT-20-02

Premium Portable Travel Toilet
SFPT-22-03

Premium Portable Travel Toilet

Your best choice for Marine, RV, Camping, Board Room, Medical Care, Pregnant women, Children and The Elderly.

FEATURES & BENEFITS

Powerful Tri-Directional Flush
Fresh Water Tank with Piston-Flush
Slick Anti-Stick Oversized Bowl
Detachable Fully-Sealed Holding Tank
Rotating Elbow For Clean & Distant Dumping
Air Relief Button Eliminates Gurgles & Splash Back
Sealed Design Prevents Leaks, Spills and Odors
Removable Seat & Cover For Easy Cleaning
Waste Tank Level Indicator
Sleek, Lightweight & Durable Modern Design



Level Indicator
Display the level of content in waste tank, avoid overflow protection.



270° Rotating Emptying Spout
M60mm rotating spout, for hygiene and better experience.



Built-in Storage Bin
Can put toilet paper or detergent



Air Release Button
Press the button to prevent spilling and splashing before use. Decompression valve exhausts to prevent sewage from spraying out.



Powerful Tri-Directional Flush Nozzle
360° vortex scouring. It uses as little as 50ml water to flush the whole bowl and waste tank can be cleaned thoroughly. Ergonomic toilet seat, longer, deeper and more comfortable.



Upgraded Lock Buckle
Connect the two tanks firmly together

Portable Toilets, Rv Toilets and Ceramic Toilets

SEAFLO offers a complete line of portable toilets and marine toilets to fit most outdoor and marine applications. The SEAFLO portable toilet is intended for mobile use, such as camping, boating, caravans, cabins, medical, children, home, emergencies, etc. It has high quality construction and makes it strong and durable. Its lightweight design makes it easy to transport and be placed anywhere.

SEAFLO Residential Height RV Toilet is a classic style RV toilet suited for all recreational vehicles. Comfortable seat and height give you a home-like experience. Gravity flush system - Efficient foot pedal operation with adjustable water volume. Slick Anti-Stick Oversized Bowl Allows for Easy Flushing.



Caravan

Yacht

Camping

Medical care

Children

Portable Toilet

FEATURES & BENEFITS

Impact & drop resistant, well-sealed
Double-layer seal to isolate peculiar smell
Compact design for easy storage and transportation
Large, comfortable seat, simple to use, easy to maintain
Split portable design, easy to carry
Anti-slip and anti-drop design
No external water or power connections required
The surface of the material is smooth, easy to wash, safe and environmentally friendly

Ceramic Toilets

FEATURES & BENEFITS

Both pump & bowl are interchangeable with JABSCO.
All spare parts can be ordered individually.
Easy-to-clean china bowl.
Includes heavy-duty push button and 1" or 1 1/2" discharge hose adapter.
Built-in Back Flow Preventer.
All Corrosion Resistant Material for Marine Use.
Electric toilets or manually operated toilets with regular bowl or compact size available.



Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-12-03	10 L (2.6 Gallon)	12 L (3.2 Gallon)	389*346*337	White	PP, POM, ABS	1 x Portable Toilet, 1 x Owners' Manual



Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-18-03	10 L (2.6 Gallon)	18 L (4.8 Gallon)	389*346*402	White	PP, POM, ABS	1 x Portable Toilet, 1 x Owners' Manual



TOILETS



Premium Portable Travel Toilet 22L

Your best choice for Marine, RV, Camping, Board Room, Medical Care, Pregnant Women, Children and the Elderly.

FEATURES & BENEFITS

Sleek, Lightweight and Durable Modern Design
 Fresh Water Tank With Powerful Piston-Flush
 22L Large Capacity Sewage Tank
 High-Powered Tri-Directional Flush Nozzle
 Slick Anti-Stick Oversized Bowl Allows for Easy Flushing
 Ergonomic Toilet Seat, Longer, Wider, More Comfortable
 Detachable Fully-Sealed Holding Tank With Ergonomic Handle
 Rotating Dumping Elbow Allows for Clean and Distant Dumping
 Air Relief Valve Button - Eliminates Dumping Gurgle and Splash-Back
 Superior Sealed Design Prevents Leaks, Spills and Odors While Transporting
 Removable Seat and Seat Cover For Easy Cleaning
 Anti-slip Pads On The Bottom Bring A More Comfortable Experience



NEW UPGRADE



Ergonomic Toilet Seat
 Longer, wider, more comfortable



Built-in Storage Bin
 Holds toilet paper or detergent for easy storage and use



Powerful Tri-Directional Flush Nozzle
 360° vortex scouring. It uses as little as 100ml water to flush the whole bowl and waste tank can be cleaned thoroughly



Flushing Manual Pump
 Easy to operate



Water Inlet
 Rotary switch cover, good sealing



Air Relief Valve Button
 Eliminates dumping gurgle and splash-back




270° Rotating Emptying Spout
 Rotating spout makes emptying easy and clean



Level Indicator
 Displays the water level in the waste tank



Upgraded Lock Buckle
 Connects the two tanks firmly together




Double Sealed Slide Valve Pull
 Superior seals prevent leaks and odor



Toilet Cover
 Sturdy toilet lid and seat with increased strength and stability

INSTRUCTIONS

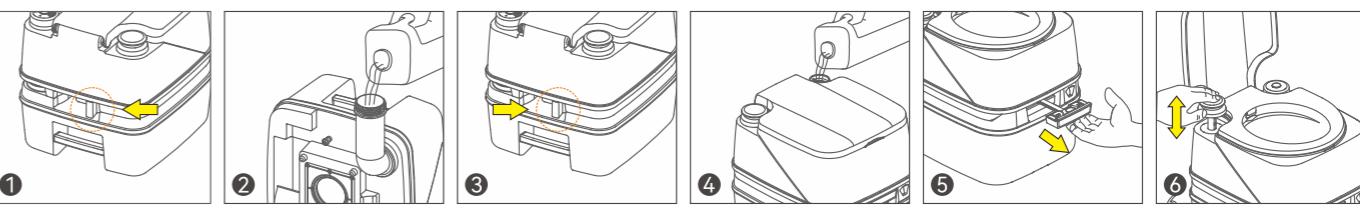

1 Separate the tanks



2 Add deodorant to the waste holding tank

3 Combine the tanks

4 Add fresh water to the fresh water tank

5 Open the slide valve to use

6 Press the pump to flush the tank



Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-22-03	15 L (4 Gallon)	22 L (5.8 Gallon)	432*384*419	White	PP, PA, POM, ABS	1 x Portable Toilet, 1 x Owners' Manual


NEW

TOILETS

Portable Toilet

Your Best Choice For Marine, Rv, camping Board Room, Medical Care, Children

FEATURES & BENEFITS

- Light weight and durable
- Brand new and high quality
- Compact design for easy storage and transportation
- Large, comfortable seat, simple to use, easy to maintain
- No external water or power connections required
- Easy to carry, easy to clean



Cover Of Waste Holding Tank



Split Portable Design



Hand Pump



Handle Of Waste Water Valve



Waste Water Valve



Sewage Drain Outlet

TOILETS

Multifunctional Portable Toilet 20L

Your best choice for Marine, RV, Camping, Board Room, Medical Care, Pregnant women, Children and The Elderly.





FEATURES & BENEFITS

- Impact & drop resistant, well-sealed
- Double-layer seal to isolate peculiar smell
- Compact design for easy storage and transportation
- Large, comfortable seat, simple to use, easy to maintain
- Split portable design, easy to carry
- Anti-slip and anti-drop design
- Blow molding process is integrated, durable and leak-proof
- Load-bearing connection lock
- The surface of the material is smooth, easy to wash, safe and environmentally friendly



 Level Indicator
 Display the level of content in waste tank, avoid overflow protection.

 180° Rotating emptying spout
 M60mm rotating spout, for hygiene and better experience.


 Air Release Button
 Press the button to prevent spilling and splashing before use. Decompression valve exhausts to prevent sewage from spraying out.

 T-type flush nozzle and bowl
 360° vortex scouring. It uses as little as 50ml water to flush the whole bowl and waste tank can be cleaned thoroughly. Ergonomic toilet seat, longer, deeper and more comfortable.


10 Liters




Up




Bottom


Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-10-01	13 L (3.43 Gallon)	10 L (2.64 Gallon)	404*353*302	Grey	PP, PA, HDPE, ABS	1 x Portable Toilet, 1 x Owners' Manual



20 Liters



Up




Bottom

Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-20-02	13 L (3.43 Gallon)	20 L (5.28 Gallon)	404*354*393	Grey	PP, PA, HDPE, ABS	1 x Portable Toilet, 1 x Owners' Manual

Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-20-01	13 L (3.43 Gallon)	20 L (5.28 Gallon)	404*353*391	Grey	PP, PA, HDPE, ABS	1 x Portable Toilet, 1 x Owners' Manual


Portable Toilet 01 Series

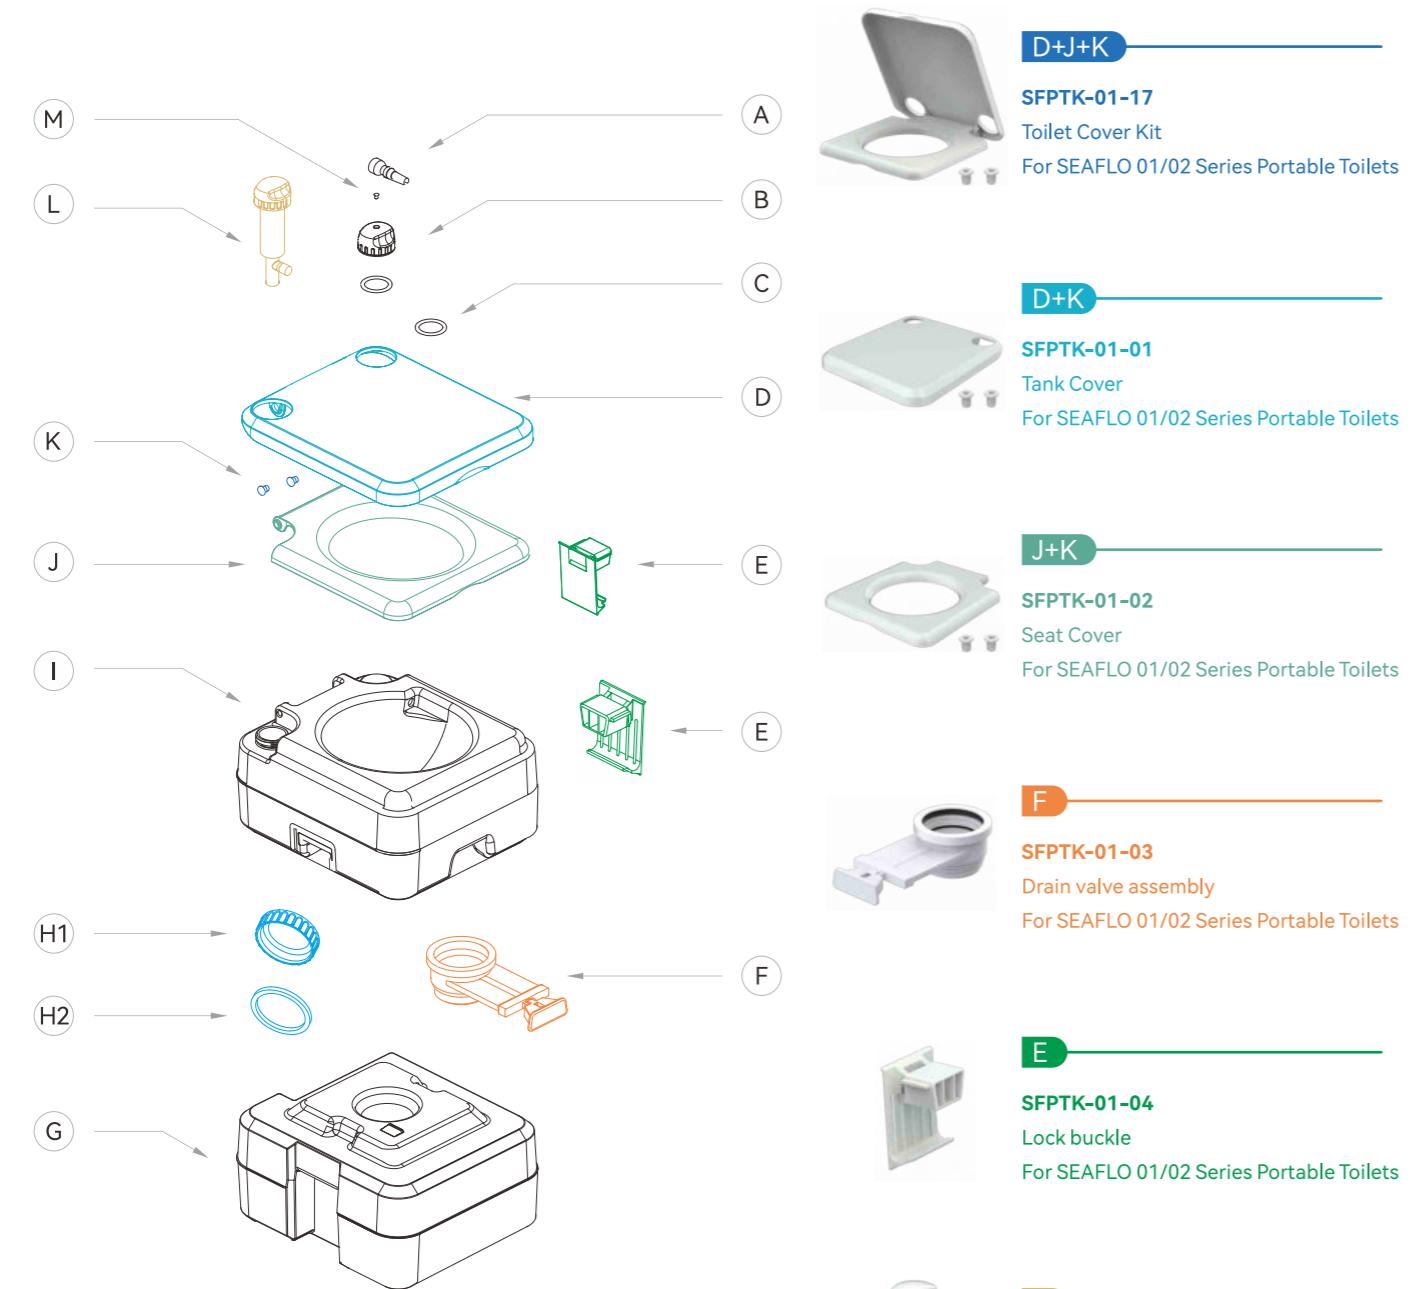

No.	Part Name	No.	Part Name
A	Outlet	H-1	Gasket
B	Tank cap	H-2	Waste holding tank cover
C	Gasket	I	Fresh water tank
D	Tank cover	J	Seat cover
E	Lock buckle	K	Fixed plug
F	Slide valve	L	Piston pump assy
G	Waste holding tank	M	Core vent assy


SEAFLO toilet service parts are sold in packages.
The individual paper list is for reference only.

Portable Toilet 02 Series

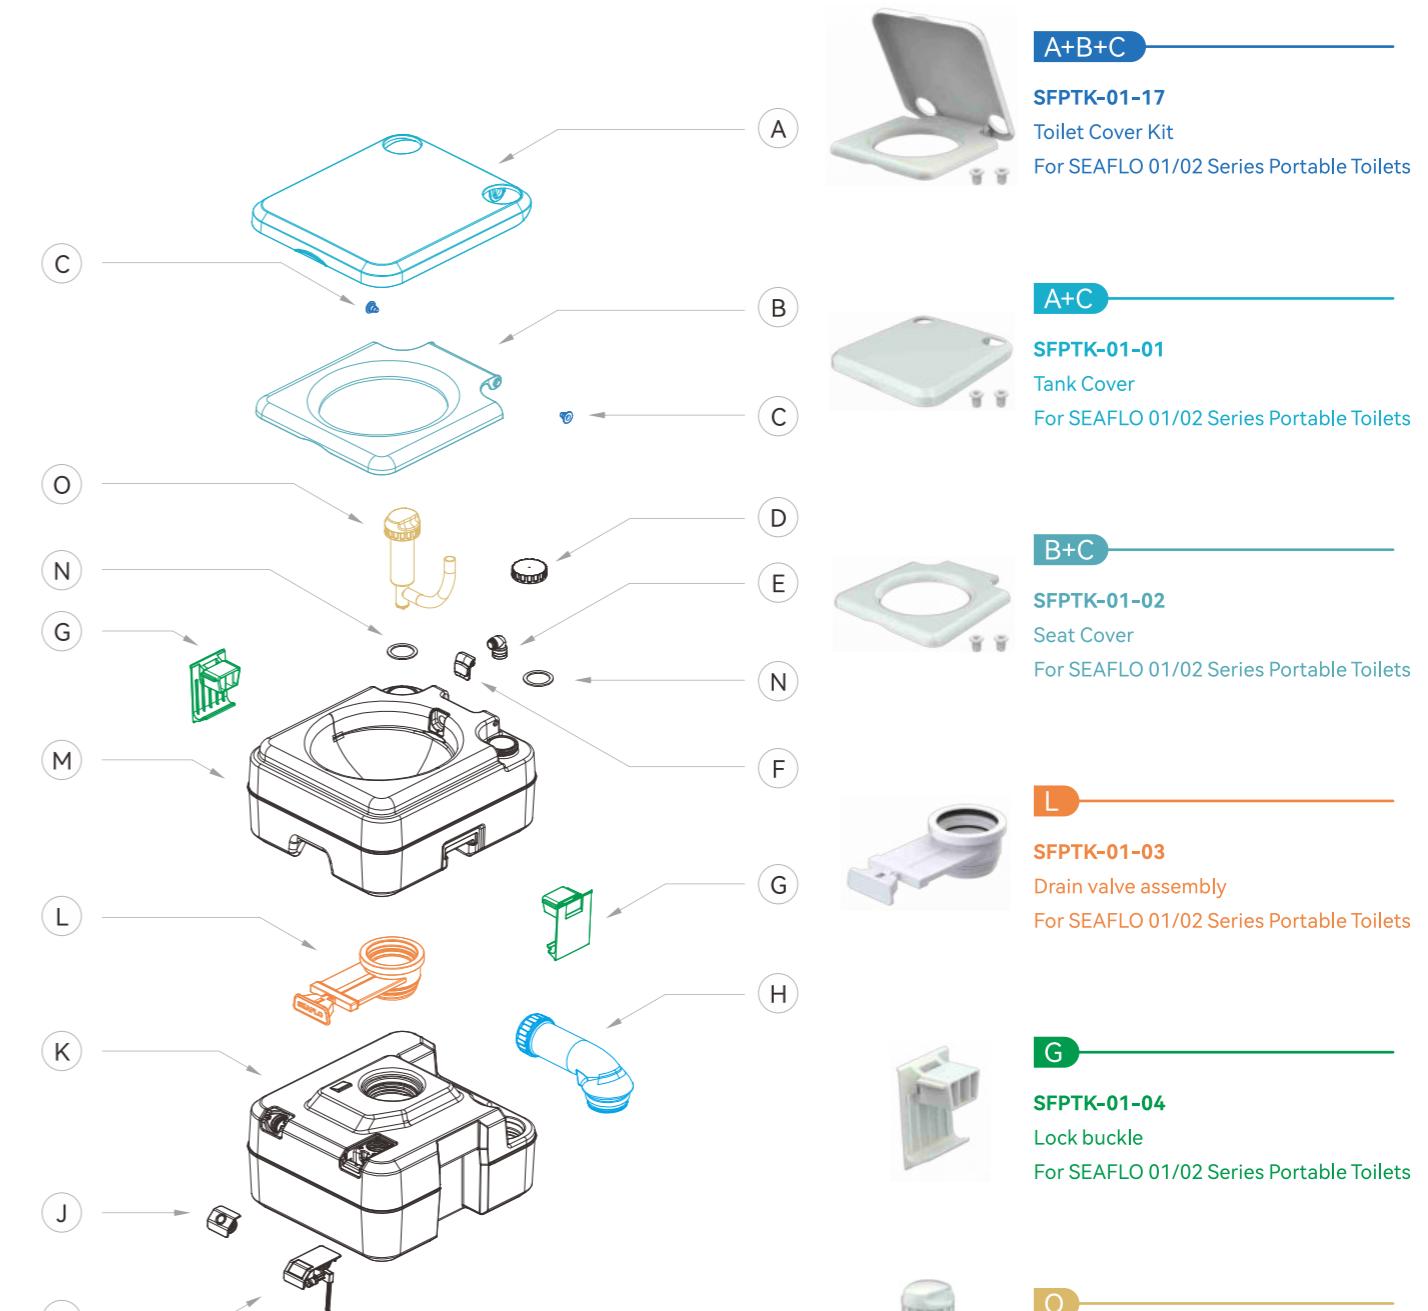

No.	Part Name	No.	Part Name
A	Tank cover	I	Observation Window
B	Seat cover	J	Exhaust Stack
C	Fixed plug	K	Waste tank
D	Tank cap	L	Slide valve
E	Piecing	M	Fresh tank
F	Outlet	N	Gasket
G	Lock buckle	O	Piston pump assy
H	Blowdown block		

SEAFLO toilet service parts are sold in packages.
The individual paper list is for reference only.

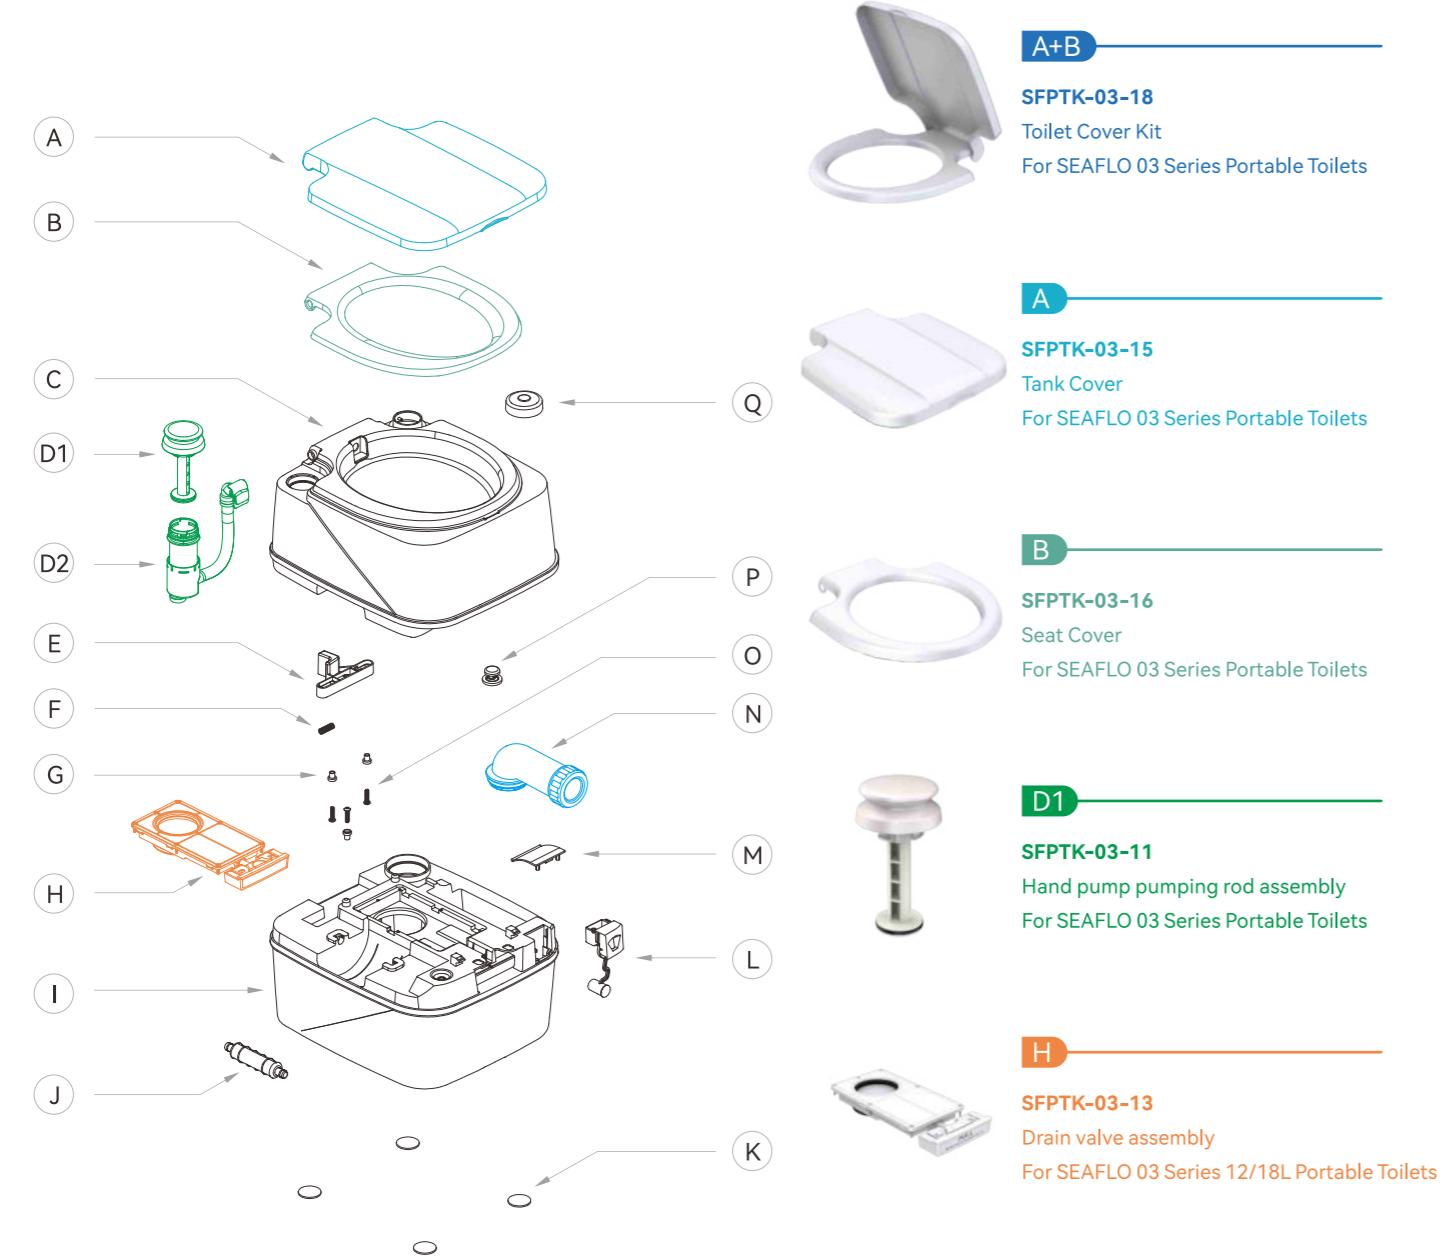Portable Toilet 03 Series


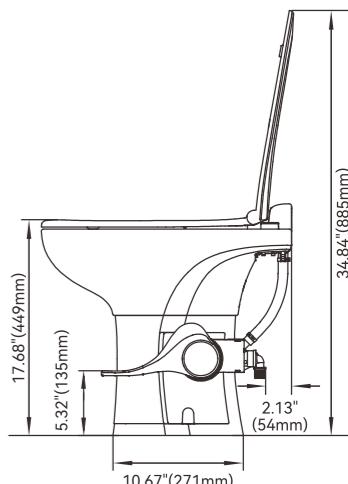
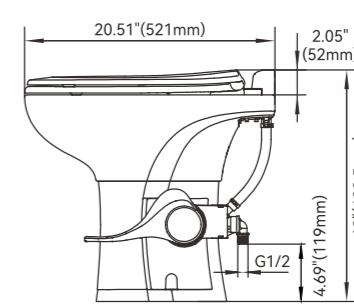

No.	Part Name	No.	Part Name
A	Tank Cover	J	Rotating Shaft
B	Seat Cover	K	Non-slip Mat
C	Fresh Tank	L	Observation Window
D	Piston Pump	M	Container Cap
E	Clasp	N	Blowdown Block
F	Spring	O	Screw
G	Fixed Plug	P	Exhaust Stack
H	Slide Valve	Q	Water Fill Cap
I	Waste Tank		

SEAFLO toilet service parts are sold in packages.

The individual paper list is for reference only.

Residential Height RV Toilet-Elongated Ceramic Bowl
NEW
FEATURES & BENEFITS


- Sleek, Modern, Durable and Sturdy
 - Features an All-Ceramic Toilet Bowl and Plastic Base
- Residential Height with Elongated Inner Seat and Bowl
 - Brings at Home Comfort to your RV
- High-Powered Tri-Directional Flush Nozzle
 - Remove Waste Completely with Each Flush
- Ergonomic Foot Pedal, 2-in-1 Efficient Flush System with Adjustable Water Flow
- Soft Close Seat and Cover - Prevents Slamming When in Motion
- Slick Anti-Stick Oversized Bowl Allows for Easy Flushing
- Optimized Toilet Design Prevents Splashing, is Hygienic and Easy to Clean
- Easy to Install - Professionally Designed for Quicker and Easier Installation



Model	Size	Accessories	Dimension
SFRTCP-02-01	Standard Height - 19"	No	20.51"x14.17"x19" (521x360x482.5 mm)
SFRTCP-02-02	Standard Height - 19"	Hand Spray Kit	20.51"x14.17"x19" (521x360x482.5 mm)

Residential Height RV Toilet-Plastic
NEW
FEATURES & BENEFITS

- Sleek, Lightweight and Durable Modern Design
- Residential Height with Elongated Inner Seat and Bowl
 - Brings At Home Comfort to your RV
- High-Powered Tri-Directional Flush Nozzles Remove Waste Completely with Each Flush
- Ergonomic Foot Pedal allows for Easiest In-Class Activation -with Adjustable Water Flow
- Soft Close Seat and Cover - Prevents Slamming when in Motion
- Slick Anti-Stick Oversized Bowl Allows for Easy Flushing
- Bowl Design Prevents Splash-Back
- Design Optimization Allows for Easiest In-Class Cleaning
- Easy to Install - Mounting Brackets Engineered for Easier Accessibility for Faster Installation

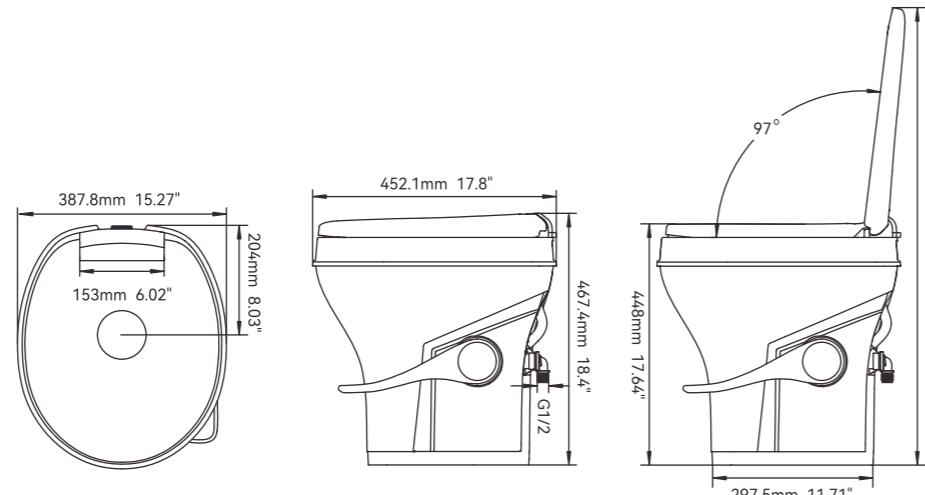

Model	Size	Accessories	Dimension	Color
SFRTPH-01-01	Standard Height - 18.5"	No	452*388*468mm	White
SFRTPH-02-01	Standard Height - 18.5"	No	452*388*468mm	Bone

Model	Size	Accessories	Dimension	Color
SFRTPH-01-02	Standard Height - 18.5"	Hand Spray Kit	452*388*468mm	White
SFRTPH-02-02	Standard Height - 18.5"	Hand Spray Kit	452*388*468mm	Bone

RV Toilet Seal
FEATURES & BENEFITS

- RV Toilet Seal Replacement for Gravity Flush RV Toilet
- Easy to Install
- High Quality, long service life
- Size:Outer Diameter: 4 Inch; Inner Diameter: 2.75 Inch.

RV Toilet Seat & Cover
FEATURES & BENEFITS

- Designed for use with SEAFL0 Gravity Flush RV Toilet
- Soft close seat
- Easy to replace
- Soft Close Seat



Model	Color
SFRTK-005	Black

Model	Color
SFRTK-006	White

Hand Spray Kit
FEATURES & BENEFITS

- White, hand spray hose for rv toilet
- Makes rinsing the bowl a breeze
- Convenient way to save water
- includes hose and wall mount



Model	Color
SFRTK-002	White

Socket Floor Flange
FEATURES & BENEFITS

- Replacement socket floor flange for RV Toilet
- Easy to install
- Fits 3" to 4" drain pipes
- Perfect close seal with the floor
- Prevent the toilet from shaking



Model	Color
SFRTK1-001	White
SFRTK2-001	Black

Water Valve Kit
FEATURES & BENEFITS

- Toilet Water Valve Kit Replacement Kit Compatible with SEAFL0 Gravity Flush RV Toilet
- Use high-quality materials to extend the service life of the valve
- Easy to use



Model	Color
SFRTK-003	White
SFRTK-004	White
SFRTK-017	White

RV Toilet Flush Pedal kit
FEATURES & BENEFITS

- The Foot pedal replacement for SEAFL0 RV Toilet model SFRTPH-01-01 and SFRTPH-01-02
- Durable, corrosion-resistant
- Easy to install


SFRTK-007
FEATURES & BENEFITS

- The Foot pedal replacement for SEAFL0 RV Toilet model SFRTPH-02-01 and SFRTPH-02-02
- Durable, corrosion-resistant
- Easy to install


SFRTK-021
Bio-pak For Spetic Toilet Treatment

Simply add one Bio-Pak into the toilet holding tank by flushing or directly add. The entire packet dissolves. Use adequate water to disperse packet contents and cover the bottom of the holding tank. Wait for 24 hours until the dirt in the pool is completely decomposed, and then it can be discharged directly. Typically one pack of product can be used for a 20 gallon pool.

FEATURES & BENEFITS

- Remove odors / No fungicide / Formaldehyde free
- 100% biodegradable
- Safe and reliable / No residues
- Rapidly degrades paper and feces

MAIN INGREDIENTS

Biological enzymes, adsorbents, deodorants, flocculants


SFTB-01

Suitable for RV, marine, portable toilet and family

Deluxe Flush Electric Toilets

SEAFLO Deluxe Flush Electric Toilets feature low noise levels, so sleeping guests will not be disturbed when the toilet is used. There are options of either flushing with fresh water from the boat's own supply or with salt, river or lake water from outside the boat. All plumbing and wiring easily concealed.

FEATURES & BENEFITS

Modern design, clean, sleek look and compliment with different styles
 Very quiet flush cycle - like a household toilet
 Low water consumption Unmatched rinsing capabilities
 Single button flush actuator - with dual function water level control switch
 Designed to be used with fresh and seawater.
 All plumbing and wiring easily concealed
 High capacity waste macerator and bowl discharge pump
 All spare parts can be ordered individually
 Ignition Protection



SFETH01

SFETH02



All plumbing and wiring easily concealed




High capacity bowl discharge pump makes toilet flushing quieter



Easy to clean ceramic bowl




Inlet 3/4" Hose Barb



Outlet 1 1/2" Hose Barb




Fresh Water 05 Series

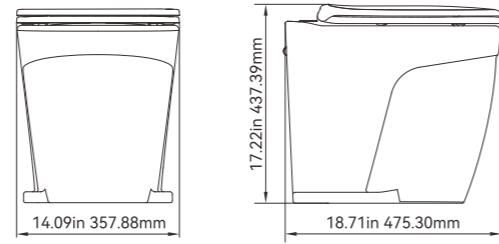

Model	Voltage	Max Draw	Port	Material	Features	Box Dimension (L*W*H)
SFMTE1-05	12V	20A	Inlet 3/4" Hose Barb	Ceramic bowl, soft close seat	Built in macerator	475X358X437 mm 18.7"x14.09"x17.2"
SFMTE2-05	24V	10A	Outlet 1 1/2" Hose Barb			



Sea Water 06 Series




Model	Voltage	Max Draw	Port	Material	Features	Box Dimension (L*W*H)
SFMTE1-06	12V	20A	Inlet 3/4" Hose Barb	Ceramic bowl, soft close seat	Built in macerator	475X358X437 mm 18.7"x14.09"x17.2"
SFMTE2-06	24V	10A	Outlet 1 1/2" Hose Barb			

Solenoid Valve & Siphon Breaker

FEATURES & BENEFITS

SEAFLO solenoid valve and siphon breaker assembly for connection to any existing pressurised water system capable of delivering 2.9gpm (11lpm) or more. The siphon breaker ensures that there is no backflow from the toilet into the water system.

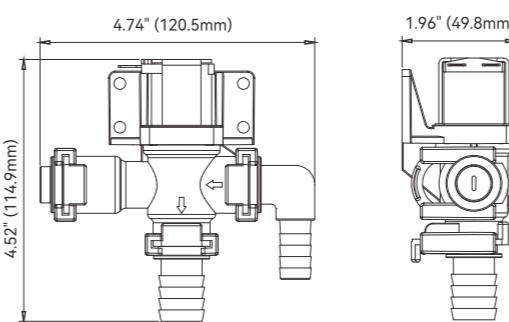


TOILETS

Model	Voltage	Power	Pressure
SFSV1-01	12V	9W	1-150 PSI
SFSV2-01	24V	9W	3-150 PSI

Rinse Pump For Marine Toilets


FEATURES & BENEFITS

- It is the standard spare part of SEAFLO quiet flush electric toilet - flushing pump
- Self priming, strong suction, suction lift up to 1.8m
- Run dry safe, max flow can reach 4.0gpm/15.0lpm
- Multiple sizes of quick-connect fittings and filters are available for easy connection to any outlet
- Quiet operation, bypass technology reduces cycling and reduces noise
- Semi-rigid rubber feet for noise reduction from vibration

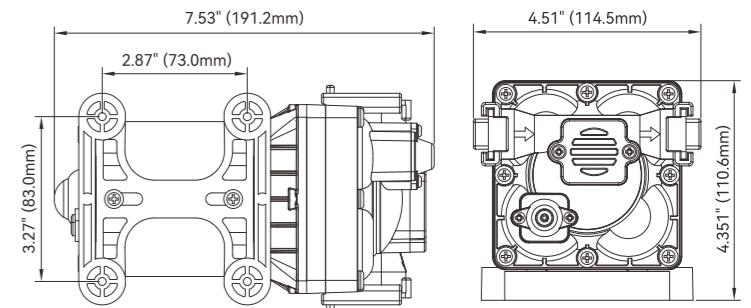

Standard Pump Configurations

Model	Voltage	GPM/LPM	PSI/BAR	Max Draw
SFDP1-040-050-43T	12V	4.0/15.0	50/3.45	13A
SFDP2-040-050-43T	24V	4.0/15.0	50/3.45	7A

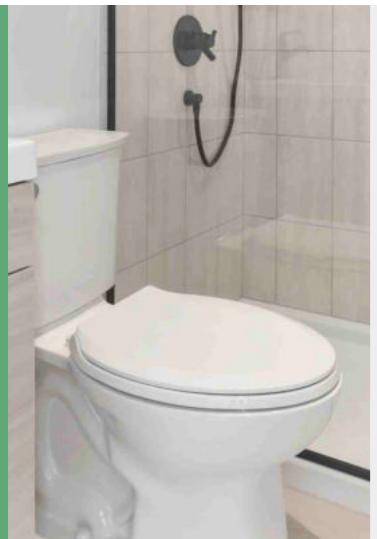


TOILETS



 Hand Flush Pump
SFMTP-03

Manually Operated Marine Toilet

SEAFLO Manually Operated Marine Toilet can be installed in both power and sailing craft, either above or below the waterline, for use on sea, river, lake or canal. Your installation may discharge the waste either overboard (provided that your national and local regulations allow this), or into a treatment system or into an on-board holding tank (U.S.C.G. Marine Sanitation Devices Type I, II and III).

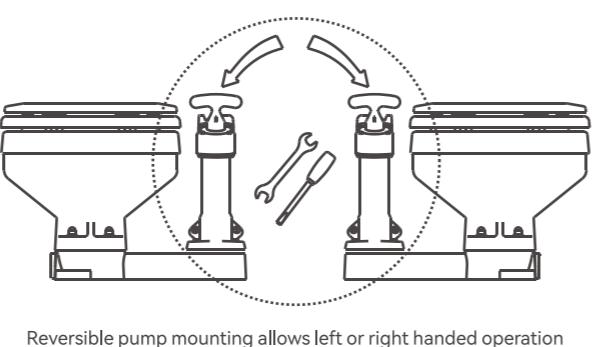

Reversible pump mounting allows left or right handed operation

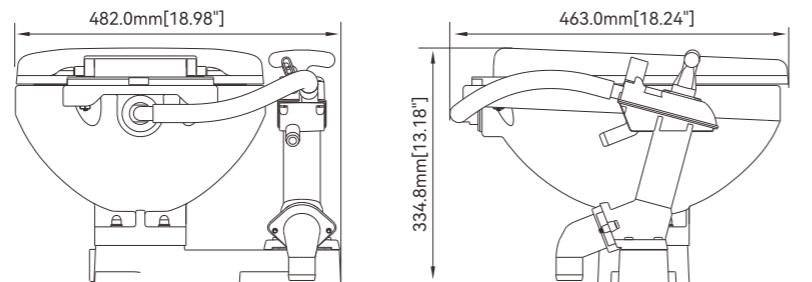

Model	Color	Diameter	Size	Type	Material
SFMTM-01-R	White	3/4" Inlet 1 1/2" Discharge	Regular	Manual Piston	Ceramic bowl, Soft close seat



In-line Blowers 02 Series

FEATURES & BENEFITS

Meets or exceeds ISO 8846 certification
 Built-in mounting feet allows easy vertical or horizontal installation
 Very low current draw, high volume air flow, long life
 Four/Six-blade fan maximizes airflow and efficiency
 Sealed motor shaft for moisture protection
 Corrosion resistant ABS plastic housing



Color Box

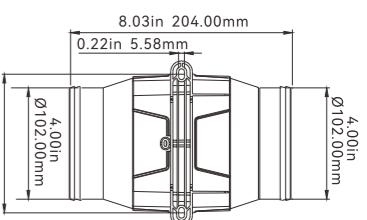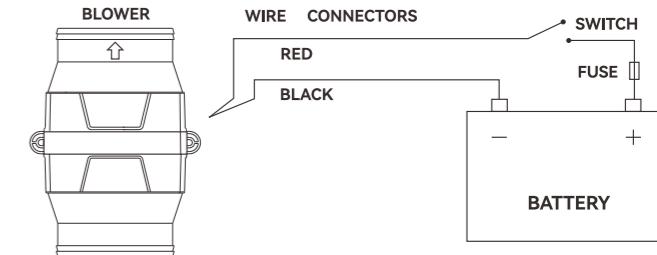

270 CFM

Technical Date

Model	Volts(V)	Air Flow(cfm/cmh)	Amp Draw(A)	Fuse (A)	Intake Pipe Dia	Packing Size(mm)	N.W./G.W.(kg)
SFIB1-270-02	12V	270/456	6.0A	10.0A	4" / 102 mm	207*154*114	0.70/0.90 kg
SFIB2-270-02	24V	270/456	3.0A	5.0A	4" / 102 mm	207*154*114	0.70/0.90 kg



In-line Blowers 04 Series

FEATURES & BENEFITS

Meets or exceeds ISO 8846 certification
 Built-in mounting feet allows easy vertical or horizontal installation
 Very low current draw, high volume air flow, long life
 Five blade fan maximizes airflow and efficiency
 Sealed motor shaft for moisture protection
 Corrosion resistant ABS plastic housing
 Smaller size for any limited area




Color Box

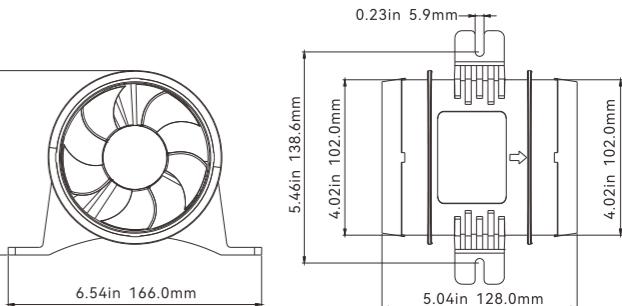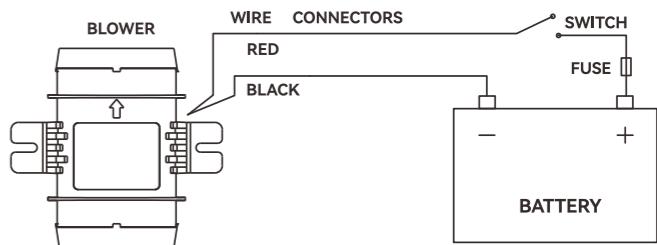

235 CFM

Technical Date

Model	Volts	Air Flow(cfm/cmh)	Amp Draw(A)	Fuse (A)	Intake Pipe Dia	Packing Size(mm)	N.W./G.W.(kg)
SFIB1-235-04	12 V	235/400	4.0	7.0	4" / 102 mm	170*133*123	0.40/0.49 kg
SFIB2-235-04	24 V	235/400	2.0	4.0	4" / 102 mm	170*133*123	0.40/0.49 kg

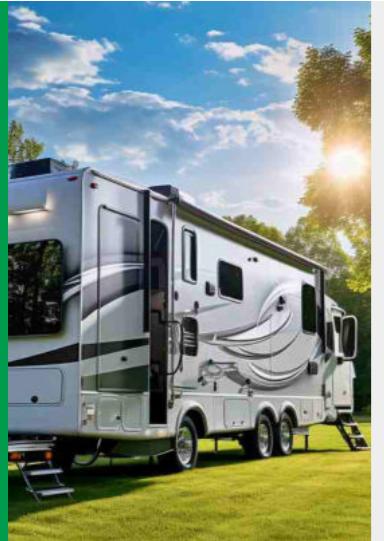
NEW

SOLAR POWER VENTILATOR


Solar Power Ventilator

FEATURES & BENEFITS

- Waterproof design
- Easy installation
- High quality battery can run the vent up to 30 hours with no sunlight
- Two types of blade(Intake & Exhaust) are provided with each vent
- Ventilator with rechargeable battery and switch
- Powered by solar and work at both day and night
- For marine, boats, yachts, trailer caravan solar vent




 Low Carbon, Environmentally Friendly Solar Power Storage,
 24 hours Availability

Model	Power	Airflow	Ventilator Cutout Diameter	Battery	Switch	Material
SFSPV-01	1.2W	900 cubic ft/h	4-3/4" (120mm)	NO	NO	ABS

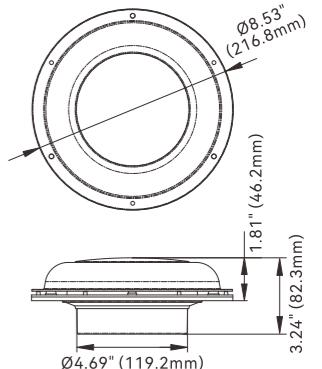
SOLAR POWER VENTILATOR


Model	Power	Airflow	Ventilator Cutout Diameter	Battery	Switch	Material
SFSPV-04	1.2W	900 cubic ft/h	4-3/4" (120mm)	YES	YES	ABS

Model	Power	Airflow	Ventilator Cutout Diameter	Battery	Switch	Material
SFSPV-02	1.2W	900 cubic ft/h	4-3/4" (120mm)	NO	NO	Stainless Steel

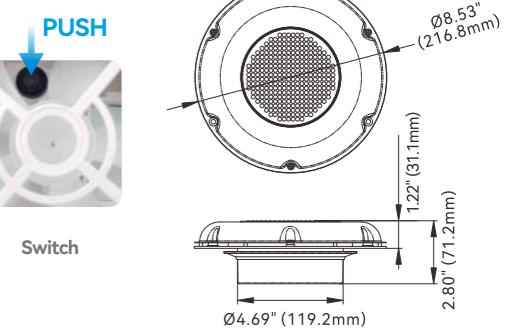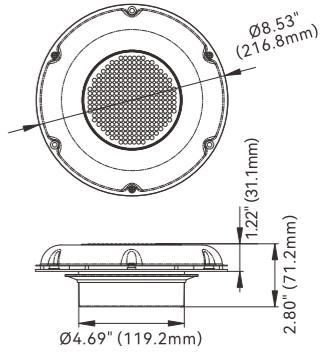

Model	Power	Airflow	Ventilator Cutout Diameter	Battery	Switch	Material
SFSPV-03	1.2W	900 cubic ft/h	4-3/4" (120mm)	YES	YES	Stainless Steel

NEW


SOLAR PANEL SYSTEM



Solar Panel System

FEATURES & BENEFITS

- Light weight design, light weight, thin thickness
- Safe and reliable, ETFE Material, IP 67 waterproof
- Higher energy conversion rate, high protection level
- One-shot molding technology anti-shatter, no cracks, no deformed
- Durable quality can be used in harsh environment
- Overcharge reverse connection protection



Solar Car Charger

Model	SFSP1-W010-01	SFSP1-W020-02
Peak Power (Wp)	10W±5%	20W±5%
Open Circuit Voltage/voc	19.3V	19.0V
Short Circuit Current/isc	0.66A	1.36A
Solar Efficiency	23%	23%
Dimension	12.48" x 8.31" x 0.09"	16.38" x 11.57" x 0.09"
Weight	0.35kg	0.5kg



200W Foldable Solar Panel

Model	SFSP1-W200-05
Peak Power (Wp)	200W±5%
Open Circuit Voltage/voc	24.8V
Short Circuit Current/isc	10.0A
DC Output	21V/9.5A
USB-A	5V/3A, 9V/3A, 12V/3A (QC3.0)
USB-C	5V/3A, 9V/3A, 12V/3A, 20V/3.25A (PD65W)
Unfolded Size	70.71" x 31.73" x 0.11"
Folded Size	15.98" x 15.94" x 1.97"
Weight	4.3kg



100W Foldable Solar Panel

Model	SFSP1-W100-04
Peak Power (Wp)	100W±5%
Open Circuit Voltage/voc	24.8V
Short Circuit Current/isc	5.3A
DC Output	21V/4.8A
USB-A	5V/3A, 9V/3A, 12V/3A (QC3.0)
USB-C	5V/3A, 9V/3A, 12V/3A, 20V/3.25A (PD65W)
Unfolded Size	40.39" x 30.16" x 0.11"
Folded Size	14.96" x 8.66" x 1.97"
Weight	2.5kg



100W Portable Solar Panel

Model	SFSP1-W100-06
Peak Power (Wp)	100W±5%
Open Circuit Voltage/voc	21.8V
Short Circuit Current/isc	5.34A
Unfolded Size	45.83" x 20.43" x 0.82"
Folded Size	22.91" x 20.43" x 1.65"
Solar Efficiency	23%
Weight	2.7kg

Battery Isolator Switch

FEATURES & BENEFITS

An interchangeable labeling system allowing a full range of applications.
 ABS Anti-aging, Anti-ultraviolet.
 May be connected to either the positive or the negative electric cable.
 In the "OFF" position the key may be removed. (SFIBS1-01 only)
 Small in size, Fine appearance, Sturdy and durable.



Product Specifications

Model	Voltage	Amps Draw(A)	Max Amp Draw(A)	N.W.	Working Tempure°C	Package
SFBIS2-01	50 V	275	1250	0.15 kg	-40~80	PE Bag





Color Box

FEATURES

- Tin-plated copper studs for maximum conductivity and corrosion resistance
- Studs accept 3/8" (M10) ring terminals
- One-piece terminal stud design never loosens over time
- Isolating cover with three snap-off side pieces protects rear contacts and allows wire access in any direction

Regulatory


- CE, RoHS, ISO 8846
- Meets all American Boat and Yacht Council (ABYC) requirements for battery switches
- Meets UL 1500 and SAE J1171 external ignition protection requirements
- IP66 – protected against powerful water jets

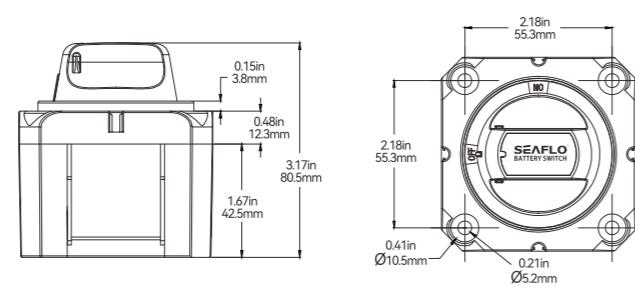



Switch Mounting Options



SFCBS-300-202



Cover breakout diagram
Apply steady pressure inwards



Engine
Starter or other load


Single Circuit ON/OFF Battery Disconnect Switch

Model	SFCBS-300-202
Cranking Rating: 30 sec.	900A DC
Intermittent Rating: 5 min.	500A DC
Continuous Rating	300A
DC Terminal Stud, Tin-Plated Copper	3/8"-16 (M10)
Torque 120 in-lb (13.56 N·m) Cable Size to Meet Ratings*	4/0 AWG (120 mm ²)
Maximum Voltage Rating	48 Volts DC
Switches a single battery to a single load group	

Switch Mounting Options Surface mounting Front panel mounting and Rear panel mounting



SFCBS-300-402




1 or 2 or 1+2

4 Position Mini Selector Battery Switch

Model	SFCBS-300-402
Cranking Rating: 30 sec.	900A DC
Intermittent Rating: 5 min.	500A DC
Continuous Rating	300A
DC Terminal Stud, Tin-Plated Copper	3/8"-16 (M10)
Torque 120 in-lb (13.56 N·m) Cable Size to Meet Ratings*	4/0 AWG (120 mm ²)
Maximum Voltage Rating	32 Volts DC
Switches an isolated battery bank to all loads or combines battery banks to all loads	

Switch Mounting Options Surface mounting Front panel mounting and Rear panel mounting

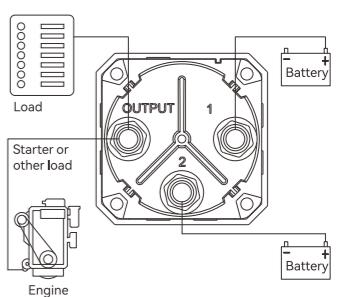

Load


Starter or other load

Engine


Deck Hatches

FEATURES & BENEFITS


- PP material anti-aging, anti-ultraviolet.
- Upgraded handle for easy access.
- 180° opening hatches with lock and key.
- Reinforced lid with non-skid surface and completely covers the mounting flange.
- Rubber seal ensures weatherproofing when mounted on vertical surfaces.




Model	H	L	h	L1	Color
SFRE1-270-375-02	10.63"(270mm)	14.76"(375mm)	7.48"(190mm)	11.42"(290mm)	White
SFRE2-270-375-02	10.63"(270mm)	14.76"(375mm)	7.48"(190mm)	11.42"(290mm)	Black

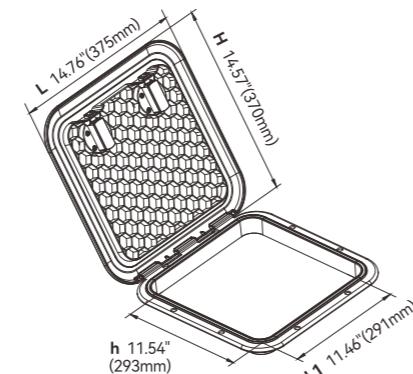


Model	H	L	h	L1	Color
SFRE1-370-375-02	14.57"(370mm)	14.76"(375mm)	11.54"(293mm)	11.46"(291mm)	White
SFRE2-370-375-02	14.57"(370mm)	14.76"(375mm)	11.54"(293mm)	11.46"(291mm)	Black

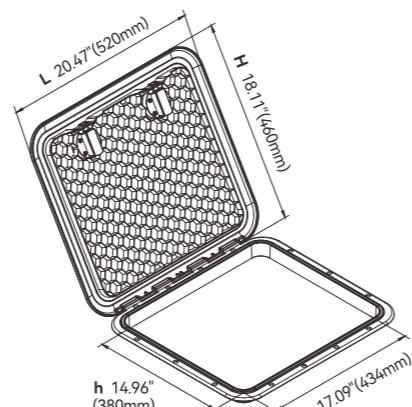


Model	H	L	h	L1	Color
SFRE1-460-510-02	18.11"(460mm)	20.47"(520mm)	14.96"(380mm)	17.09"(434mm)	White
SFRE2-460-510-02	18.11"(460mm)	20.47"(520mm)	14.96"(380mm)	17.09"(434mm)	Black

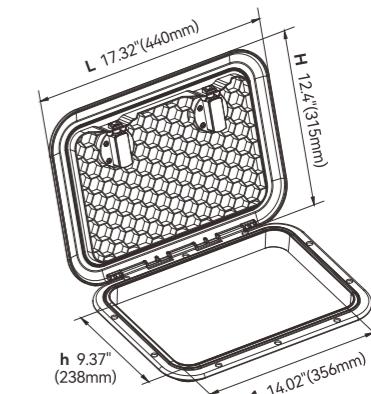

Model	H	L	h	L1	Color
SFRE1-315-440-02	12.4"(315mm)	17.32"(440mm)	9.37"(238mm)	14.02"(356mm)	White
SFRE2-315-440-02	12.4"(315mm)	17.32"(440mm)	9.37"(238mm)	14.02"(356mm)	Black

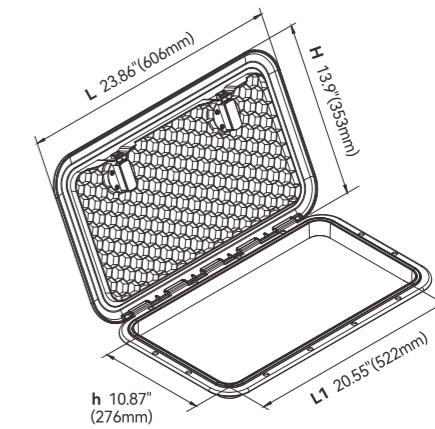

Model	H	L	h	L1	Color
SFRE1-353-606-02	13.9"(353mm)	23.86"(606mm)	10.87"(276mm)	20.55"(522mm)	White
SFRE2-353-606-02	13.9"(353mm)	23.86"(606mm)	10.87"(276mm)	20.55"(522mm)	Black

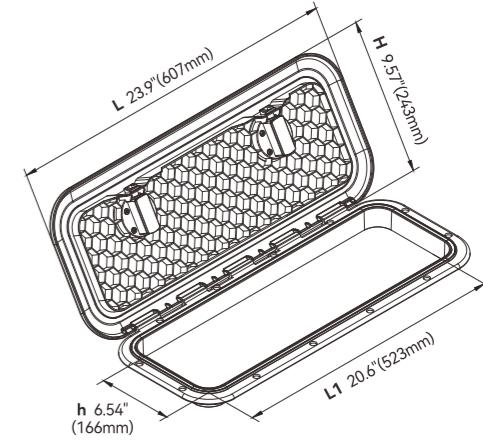

Model	H	L	h	L1	Color
SFRE1-243-607-02	9.57"(243mm)	23.9"(607mm)	6.54"(166mm)	20.6"(523mm)	White
SFRE2-243-607-02	9.57"(243mm)	23.9"(607mm)	6.54"(166mm)	20.6"(523mm)	Black



Round Deck Hatches

PP material anti-corrosive; Anti-aging; Ultraviolet resistant.

Rotary switch, simple installation and usage.



Heavy duty lid with non-slip surface.

4/6/8 inch boat deck plate can be installed vertically and horizontally.

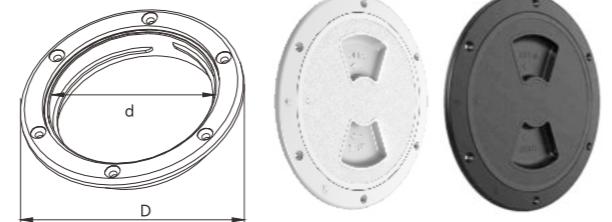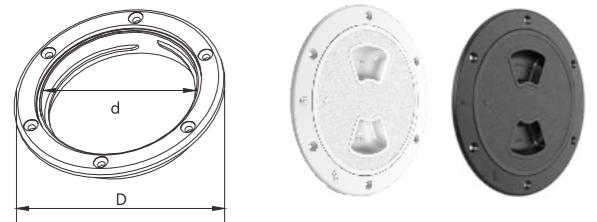

Model	Size	d	D	Color
SFRH1-004-02	4"(101.6mm)	4"(101.6mm)	5.67"(144mm)	white
SFRH2-004-02	4"(101.6mm)	4"(101.6mm)	5.67"(144mm)	Black

Model	Size	d	D	Color
SFRH1-005-02	5"(127mm)	5"(127mm)	6.77"(172mm)	white
SFRH2-005-02	5"(127mm)	5"(127mm)	6.77"(172mm)	Black

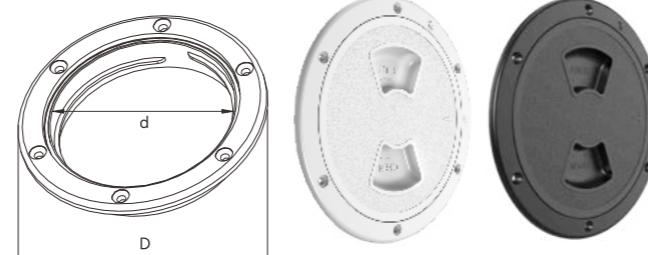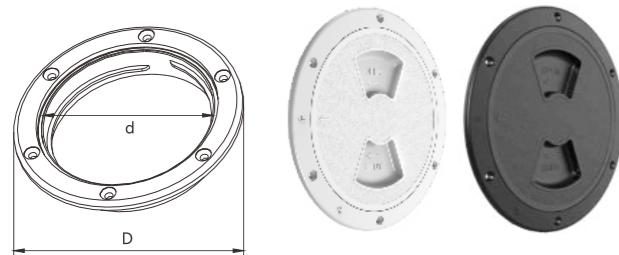

Model	Size	d	D	Color
SFRH1-006-02	6"(52.4mm)	6"(52.4mm)	8.07"(205mm)	white
SFRH2-006-02	6"(52.4mm)	6"(52.4mm)	8.07"(205mm)	Black

Model	Size	d	D	Color
SFRH1-008-02	8"(203.2mm)	8"(203.2mm)	10.04"(255mm)	white
SFRH2-008-02	8"(203.2mm)	8"(203.2mm)	10.04"(255mm)	Black

External Shower

SEAFLO External Shower Box is made of UV stabilized PP, which is with lock and keys.

The box is durable, impact & fade resistant.



Model	Color
SFES1-01	White
SFES2-01	Black

Shower Head And Hose Kit**FEATURES & BENEFITS**

ABS plastic shower head

1.5 m/5 feet PVC Hose

Two function spray setting

UV protected, fade resistant

With flat gasket

Compatible to SEAFLO handheld shower kit




Model	Color
SF-SHHK001	White

Model	Color
SFHK1-01	White

Model	Color
SFHK1-02	White

Vent Cover

SEAFLO Vent Cover is made of UV stabilized PP, which is very easy to be installed. There are up to two blades that can be adjusted to change the air flow. Also two of blades can be detached to get a largest air flow.

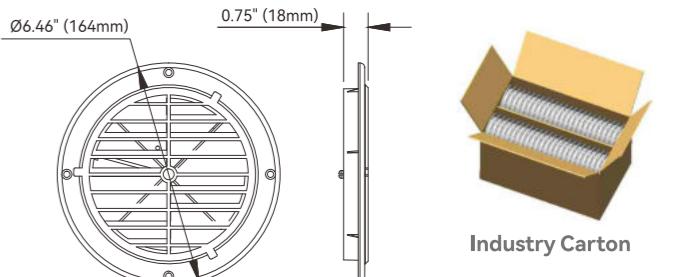**FEATURES & BENEFITS**

Made of UV resistant PP

Air flow can be adjusted by blades

Blades are removable

Easy to install



Model	Blade	Color
SFVC1-01	0	White
SFVC2-01	0	Black

Model	Blade	Color
SFVC1-02	2	White
SFVC2-02	2	Black


Pvc Waste Valve

SEAFLO PVC Waste Valve is used on sewer line in kitchen, bath room, washing sink to prevent bad smell come into internal of RV.

FEATURES & BENEFITS

- PVC size is 2"
- Vertical mounting position
- EPDM seal for resistance to water and oils
- PVC construction for strength and resistance to corrosion and mild chemicals

Model	Color
SFWV1-01	White
SFWV2-01	Black



PVC Waste Check Valve
GRAYWATER TANK



Fold-up Adjustable Drink Holder

SEAFLO Fold-Up Adjustable Drink Holder for RVs, cars, trucks, boats, cans etc, help prevent spills and mounts quickly and easily. This holder features arms that easily adjust to hold almost any size bottle, can or mug. Folds up for compact storage. It easily mounts with tapes or screws.

FEATURES & BENEFITS

- Easily adjust to hold almost any size bottle, can or mug
- Mounts with tapes or screws
- Folds up for compact storage

Model	Size	Color
SFTS1-01	98.3 * 95 * 97.7 mm	White
SFTS2-01	98.3 * 95 * 97.7 mm	Black

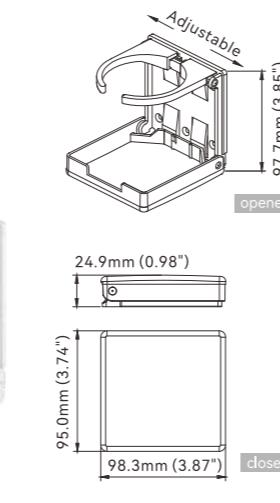


Round Louver Air Vent

SEAFLO Round Louvre air vent is made of high quality ABS, Diameter 77.8 mm, ducting height 69.5 mm, Wall mounted or ceiling mounted, perfect for RV, boat or room exhaust and ventilation use.

FEATURES & BENEFITS

- 69.5 mm Ducting Fitting Size
- High-Quality ABS Plastic
- Simple To Fit
- Designed To Cover Wall Or Ceiling Openings And Ducting Vents

Model	Size	Color
SFAV1-01	93.5 * 93.5 * 69.5 mm	White
SFAV2-01	93.5 * 93.5 * 69.5 mm	Black

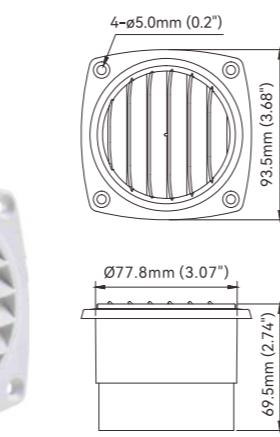

Frost Control Valve

NEW

FEATURES & BENEFITS




- Manual drain valve
- Frost monitor
- Reliable performance
- Easy to install and use



3 TYPES OF CONNECTORS AVAILABLE



SFFCV2-01 Pagoda SFFCV2-02 Quick connect SFFCV2-03 External thread

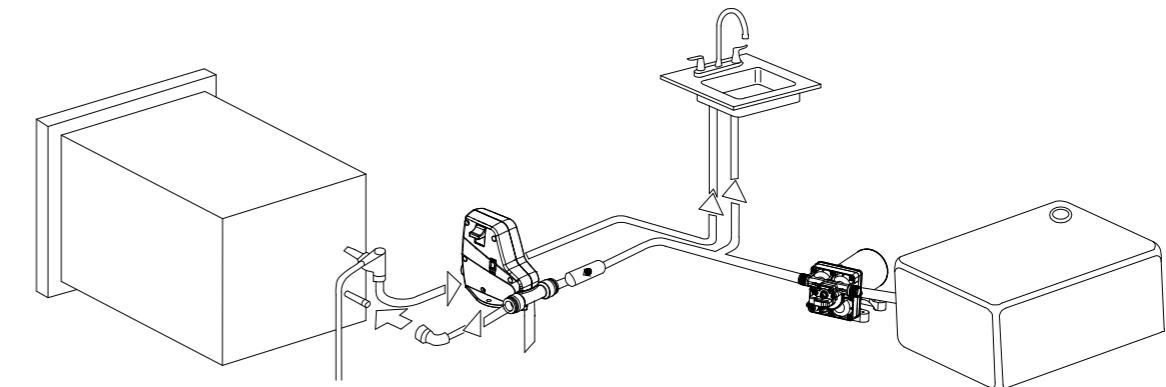


Model	connection	Closing temperature	Opening temperature	Operating temperature
SFFCV2-01	Ø12mm hose connection	over approx. 7°C (ambient temperature)	below approx. 3°C (ambient temperature)	-30°C ~ +70°C
SFFCV2-02	Ø12mm fixed pipe connection	over approx. 7°C (ambient temperature)	below approx. 3°C (ambient temperature)	-30°C ~ +70°C
SFFCV2-03	1/2" NPT connectors connection	over approx. 7°C (ambient temperature)	below approx. 3°C (ambient temperature)	-30°C ~ +70°C

Plumbing Vent

SEAFLO Plumbing Vent is made of PP and it fits up to a 2 inch diameter with 2-1/2 Inch projection vent pipes. A top cap is included, which can be locked on or removed with a twist of the wrist without the need of tools.

Model	Size	Color
SFPV1-01	5.3" * 2.8" (134.5 * 71.5 mm)	White
SFPV2-01	5.3" * 2.8" (134.5 * 71.5 mm)	Black




Water Inlet

SEAFLO Water Inlet is used for fresh water system and it is constructed with UV stabilized plastic. There are a check valve inside and different model have different features.

Water Inlet Pressure Reducing Valve NEW

FEATURES & BENEFITS

- Continuous protection from high pressure surges
- Constructed With Uv Stabilized Plastic
- Quick, permanent wall mount installation
- Fits standard hose fittings
- Built In Check Valve
- Outlet Pressure: 50psi
- Inlet Pressure: 125psi Max

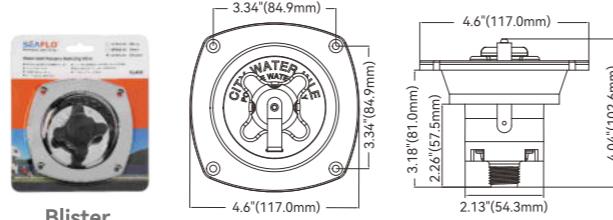


Model	Description	Color
SFWI1-04	Water Inlet	White
SFWI2-04	Water Inlet	Black
SFWI3-04	Water Inlet	Chrome

Water Inlet-01

FEATURES & BENEFITS

- Constructed with UV stabilized plastic
- Fits standard hose fittings
- Built in check valve
- Brass pipe threads
- Quick, permanent wall mount installation

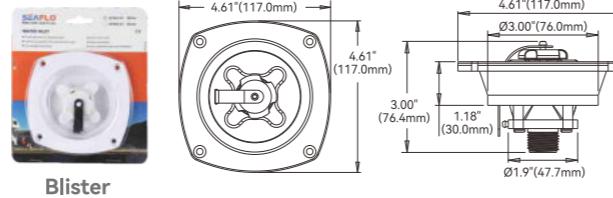


Model	Description	Color
SFWI1-01	Water Inlet	White
SFWI2-01	Water Inlet	Black

Water Inlet With Lock-02

FEATURES & BENEFITS

- With 2 Keys & Lock
- 1/2" air vent for a fast fill
- Design for filling the water holding tank
- Constructed with UV stabilized Plastic

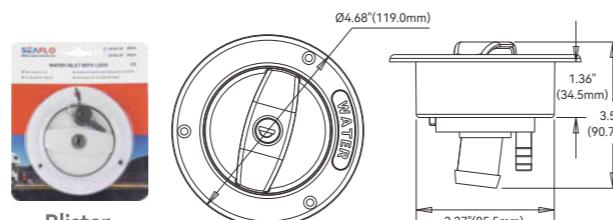


Model	Description	Color
SFWI1-02	Water Inlet With Lock	White
SFWI2-02	Water Inlet With Lock	Black

Plastic Water Inlet-03

FEATURES & BENEFITS


- Constructed with plastic
- Can fit into SEAFLO water inlet hatch
- 1/2" BSP and G1/2 thread
- Built in check valve

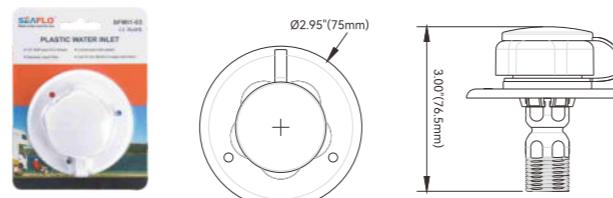


Model	Description	Color
SFWI1-03	Plastic Water Inlet	White
SFWI2-03	Plastic Water Inlet	Black

Square Cable Hatch

SEAFLO Square Cable Hatch is for use with RV electrical cables, and it is constructed with UV stabilized ABS. Hatch comes with 2 keys and the hatch door has slide window for door closure while hooked up.

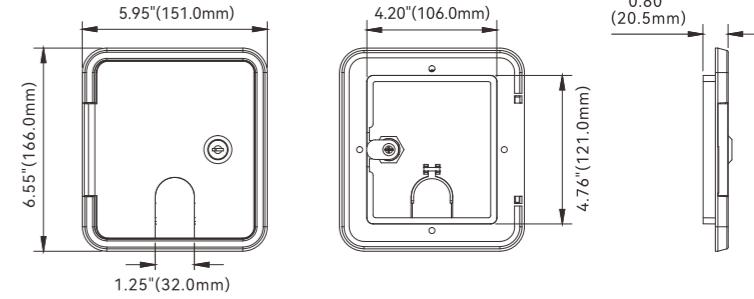


Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFCH1-151-166-01	5.94"(151mm)	6.54"(166mm)	4.17"(106mm)	4.76"(121mm)	White
SFCH2-151-166-01	5.94"(151mm)	6.54"(166mm)	4.17"(106mm)	4.76"(121mm)	Black

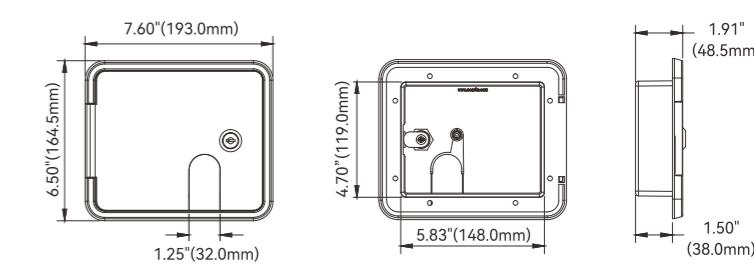

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFCH1-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	White
SFCH2-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	Black

Round Cable Hatch



SEAFLO Round Cable Hatch is for use with RV electrical cables, and it is constructed with UV stabilized PP. Its hinge is extra heavy duty. It has a 5.2" round O.D. flange and a 2.6" deep cavity to hold the cable end.

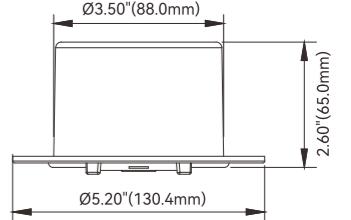

Model	Out-Size	In-Size	Color
SFCH1-052-03	5.2"×2.6"(130×66mm)	3.5"(88mm)	White
SFCH2-052-03	5.2"×2.6"(130×66mm)	3.5"(88mm)	Black

Water Inlet Hatch


SEAFLO Water Inlet Hatch is made of UV stabilized ABS with robust reinforcement. They have a 1/2 inch air vent for a fast fill and lockable hatch with 2 keys. Also installation screw and putty type are included.

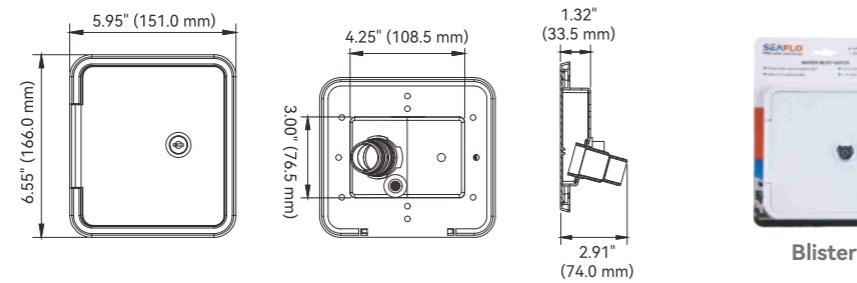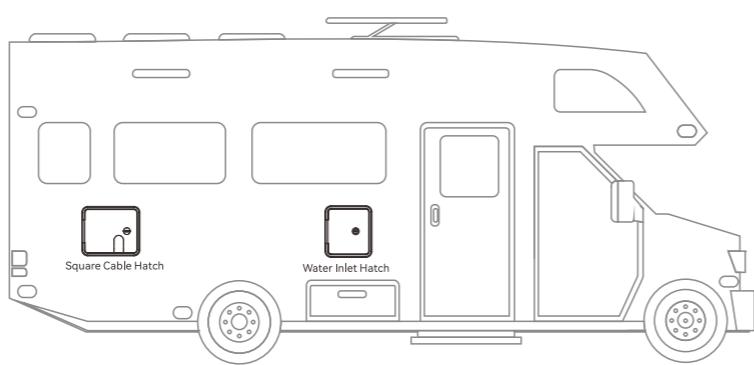

Blister

Technical Data

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-151-166-01	5.94"(151mm)	6.54"(166mm)	4.27"(108.5mm)	3.01"(76.5mm)	White
SFWH2-151-166-01	5.94"(151mm)	6.54"(166mm)	4.27"(108.5mm)	3.01"(76.5mm)	Black

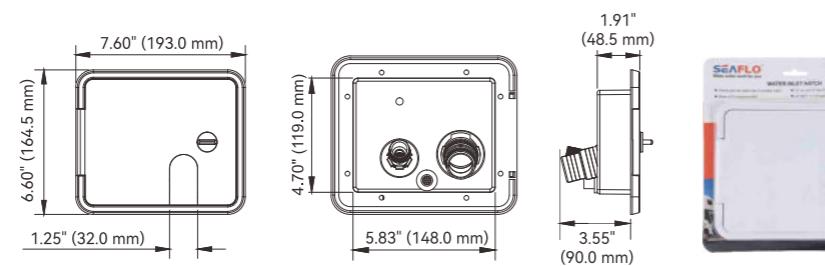

Blister

Technical Data



Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	White
SFWH2-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	Black

Dent Vent


SEAFLO Dent Vent is use for a quick and easy way to repair the minor damage of boat body and keep the original look; which are made of UV stabilized plastic and combine multiple vents to cover larger damage areas.

FEATURES & BENEFITS



Keep the original look
Made of UV resistant ABS
There are 3 sizes available
A quick and easy way to repair the minor damage of boat body
Save expensive maintenance costs
Combine multiple vents to cover larger damage areas

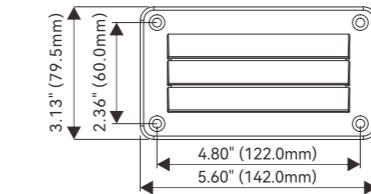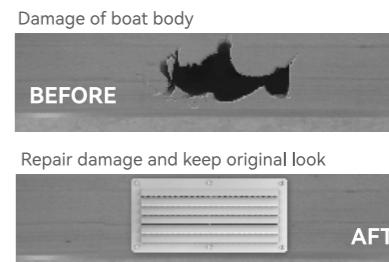


Model	L	H	Color
SFDV1-140-79-01	5.60"(142.0 mm)	3.13"(79.5 mm)	White
SFDV2-140-79-01	5.60"(142.0 mm)	3.13"(79.5 mm)	Black

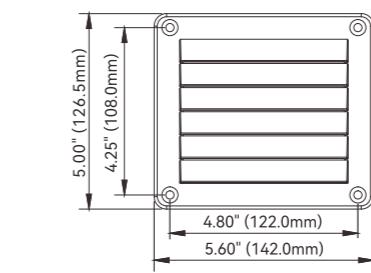

Model	L	H	Color
SFDV1-140-125-02	5.60"(142.0 mm)	5.00"(126.5 mm)	White
SFDV2-140-125-02	5.60"(142.0 mm)	5.00"(126.5 mm)	Black

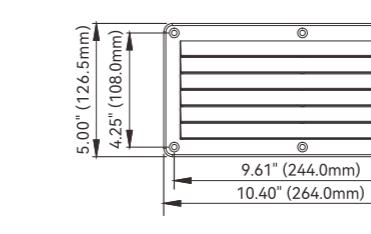


Model	L	H	Color
SFDV1-260-125-03	10.40"(264.0 mm)	5.00"(126.5 mm)	White
SFDV2-260-125-03	10.40"(264.0 mm)	5.00"(126.5 mm)	Black

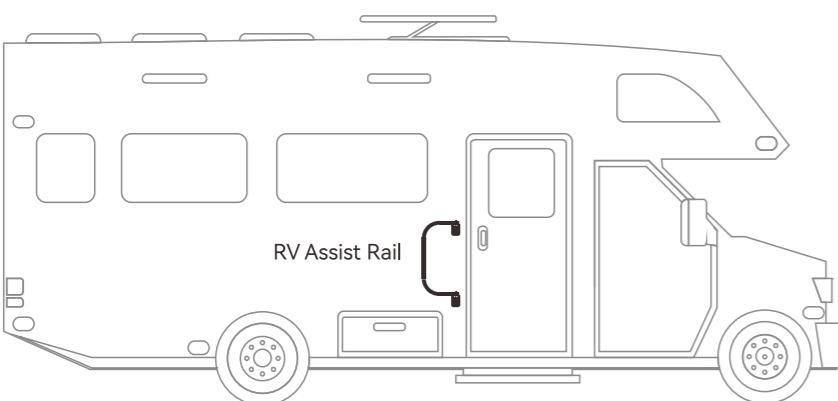

RV Assist Rail Mini

FEATURES & BENEFITS

Provides a secure hold for entering and exiting your RV
 Designed to help you keep and maintain your balance
 Folds & locks to the side of your RV without tools
 Locks open to make entering and exiting your RV easier
 Available in white or black finishes with a black foam grip
 Available in 22.05" and 26.73" length

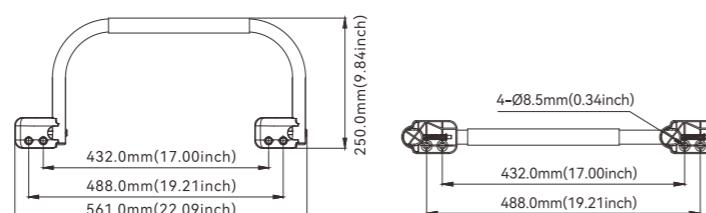


Model	Size	Color	Material
SFAR1-01	560mm*250mm*59.5mm	White	aluminum
SFAR2-01	560mm*250mm*59.5mm	Black	aluminum

RV Assist Rail Standard

FEATURES & BENEFITS

Provides a secure hold for entering and exiting your RV
 Designed to help you keep and maintain your balance
 Folds & locks to the side of your RV without tools
 Locks open to make entering and exiting your RV easier
 Available in white or black finishes with a black foam grip
 Available in 22.05" and 26.73" length


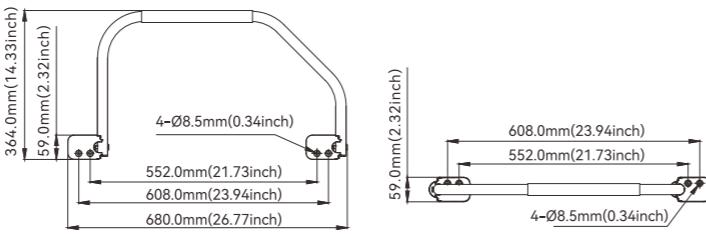


Model	Size	Color	Material
SFAR1-02	680mm*365mm*59.5mm	White	aluminum
SFAR2-02	680mm*365mm*59.5mm	Black	aluminum

Grab Handle

FEATURES & BENEFITS

SEAFLO Grab Handle designed for safety and convenience
 Easy to install - Fits most RV's, Travel Trailer's, Fifth Wheel Trailers, Campers, Motor Home's, Cargo Trailers and Boats
 Can be mounted vertically or horizontally

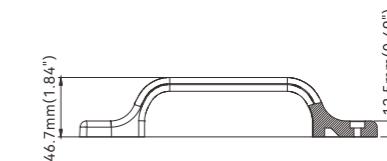


Model	Size	Color	Material
SFDK1-01	232mm*46.7mm*12.5mm	White	PA66
SFDK2-01	232mm*46.7mm*12.5mm	Black	PA66

Arch Assist Handle

FEATURES & BENEFITS

SEAFLO Arch Handle designed in clean styling, shaped to fit your hand for a secure grip
 Easy to install - Fits most RV's, Travel Trailer's, Fifth Wheel Trailers, Campers, Motor Home's, Cargo Trailers and Boats
 Made with All Weather Impact Resistant Polypropylene

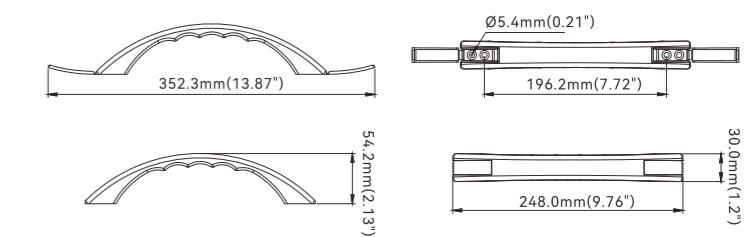


Model	Size	Color	Material
SFDK1-02	248mm*30mm*54.2mm	White	PP
SFDK2-02	248mm*30mm*54.2mm	Black	PP

Soft Touch Rv Hand Rail

FEATURES & BENEFITS

Provides traction and grip for your hand
 Comfort grip for added stability and comfort
 More user friendly than most manufacture hand rails

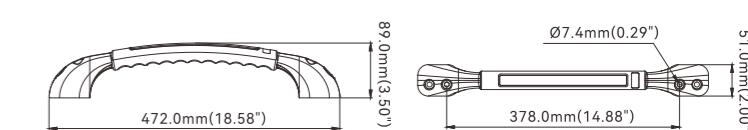

Model	Size	Material
SFDK1-03	472mm*51mm*89mm	ABS & TPE



Fuel Transfer Pump

FEATURES & BENEFITS

Free you from lifting heavy fuel cans
 Fast transfer rate up to 3.2GPM
 The flow rate can be controlled by manual control nozzle
 Overload protection to prevent from safety hazard
 Portable and light weight for easy store and convenient use
 Work perfectly with SEAFLO fuel cans
 Transfers Gasoline, Diesel, Antifreeze, Light Oil, Chemical insecticides, Detergent, etc



Simple Switch
Switch on to start pump



Simple Hook
Hook nozzle when not use



Color Box

Standard Tank Configurations

Model	Battery	Voltage	Max Flow Rate	Max Head	Duration	Tubing length	N.W / G.W
SFFTP5-025-01	2pcs of D battery (N/A)	3V	2.5GPM	4.92' / 1.5m	1 H	in: 506 mm out: 1050 mm	387 / 610 g
SFFTP5-032-01	Rechargeable lithium battery	3.7V	3.2GPM	9.84' / 3.0m	2 H	in: 506 mm out: 1050 mm	513 / 760 g
SFFTP1-032-01	No, with power cable	12V	3.2GPM	9.84' / 3.0m	Continuous	in: 506 mm out: 1050 mm	393 / 710 g

Fuel Transfer Pump

FEATURES & BENEFITS

Free you from lifting heavy fuel cans
 Fast transfer rate up to 2.4GPM
 The flow rate can be controlled by manual control nozzle
 Overload protection to prevent from safety hazard
 Portable and light weight for easy store and convenient use
 Work perfectly with SEAFLO fuel cans
 Transfers Gasoline, Diesel, Antifreeze, Light Oil, Chemical insecticides, Detergent, etc



Simple Switch
Switch on to start pump



Simple Hook
Hook nozzle when not use



Battery Powered Fuel Transfer Pump

FEATURES & BENEFITS

LED is on when pump turns on, and off when pump turns off
 Explosion-proof motor and overload protection
 Weather-resistant and corrosion-resistant hose
 Auto-stop sensor to stop when full
 Simply press to start and stop



With level sensing
function, automatic stop
when filling up



Reminder of the operating
status of the oil pump with
indicator light



FTP21
48.4 mm

FTP22
59.5 mm

FTP23
65.2 mm

Standard Pump Configurations

Model	Battery	Max Flow Rate	Max Head	Tubing length
SFFTP5-024-02	AA (N/A)	2.4GPM	4.92' / 1.5m	in: 506 mm out: 1050 mm
SFFTP5-032-02	Lithium	3.2GPM	9.84' / 3.0m	in: 506 mm out: 1050 mm

Battery Powered Fuel Transfer Pump

FEATURES & BENEFITS

LED is on when pump turns on, and off when pump turns off
 Explosion-proof motor and overload protection
 Weather-resistant and corrosion-resistant hose
 Auto-stop sensor to stop when full
 Simply press to start and stop



With level sensing
function, automatic stop
when filling up



Reminder of the operating
status of the oil pump with
indicator light



FTP21
48.4 mm

FTP22
59.5 mm

FTP23
65.2 mm

FTP24
41.4mm

Standard Pump Configurations

Model	Battery	Max Flow Rate	Max Head	Tubing length
SFFTP5-022-02	AA (N/A)	2.2GPM	4.92' / 1.5m	in: 480 mm out: 1050 mm
SFFTP5-025-02	Lithium	2.5GPM	5.91' / 1.8m	in: 480 mm out: 1050 mm

All Star Series - Auto Shut Off Fuel Cans / 5L, 10L, 20L

DESCRIPTION

It is the latest version (the third generation) of SEAFLO all-star jerry can. With more user-friendly designs, SEAFLO all-star jerry can is more convenient and safer to use. It can hold gasoline, diesel, engine oil, alcohol, clean fuels, etc. The products are widely used in outdoor fuel equipment, such as automobiles, RVs, yachts, garden tools, agricultural equipment, ATVs; it also can be used in pharmaceutical factories, gas stations, energy factories, etc.

FEATURES & BENEFITS

- ① Auto shut off nozzle is easy to operate and will be closed automatically to prevent from leakage
- ② Child proof lock for safer use
- ③ Unique liquid level line for checking the volume at a glance
- ④ Innovative U-shaped groove design, Body of can has better ability of shock resistance, which make it solid and durable
- ⑤ Venting hole ensures faster and safer filling
- ⑥ Humanized side handle for easier use
- ⑦ The fixation problems during transportation is solved easily when U-shaped groove and band fit together.
- ⑧ Widened bottom to prevent from falling; for easy and safe storage, transportation
- ⑨ Slot design for easy stacking
- ⑩ Meet Australian standard of AS/NZS 2906:2001
- ⑪ Meet requirements of EPA & CARB certification



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color
SFGT-05-02	5 L	265*138*242 mm	0.8 kg	Gasoline	Red
SFGT-10-02	10 L	290*184*325 mm	1.3 kg		
SFGT-20-02	20 L	345*224*395 mm	1.8kg		



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color
SFDT-05-02	5 L	265*138*242 mm	0.8 kg	Diesel	Yellow
SFDT-10-02	10 L	290*184*325 mm	1.3 kg		
SFDT-20-02	20 L	345*224*395 mm	1.8kg		



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color
SF2T-05-02	5 L	265*138*242 mm	0.8 kg	Two-stroke	Green
SF2T-10-02	10 L	290*184*325 mm	1.3 kg		
SF2T-20-02	20 L	345*224*395 mm	1.8kg		

Consult factory for other available models

Plastic 5L, 10L, 20L Auto Shut Off Fuel Cans

Fuel Container Gasoline, Diesel, Two-stroke engine oil EAP & AS/NZS 2906:2001 Standards

DESCRIPTION

Seaflo 5, 10 & 20 Litre automatic shut off fuel cans which are designed with specially proportioned rear handle for balanced pouring that is self venting for safer & easier pouring.

Features reduced emissions to protect the environment and meets EAP & AS/NZS 2906:2001 Standards.

TYPICAL APPLICATIONS

Car, lawnmower, atv or snowblower and other essential equipment topped off with fuel



FEATURES & BENEFITS

- Complies to EPA & CARB Standards
- Spill Proof, Durable Vented Pouring Spout
- UV Stabilized High Grade Polyethylene
- Certified to Australian Standard AS/NZS 2906:2001



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color	Handle Type
SFGT-05-01	5 L	260*130*275 mm	0.8 kg	Gasoline	Red	Built-in
SFGT-10-01	10 L	290*160*346 mm	1.3 kg			
SFGT-20-01	20 L	330*190*476 mm	1.8kg			



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color	Handle Type
SFDT-05-01	5 L	260*130*275 mm	0.8 kg	Diesel	Yellow	Built-in
SFDT-10-01	10 L	290*160*346 mm	1.3 kg			
SFDT-20-01	20 L	330*190*476 mm	1.8kg			



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color	Handle Type
SF2T-05-01	5 L	260*130*275 mm	0.8 kg	Two-stroke Gasoline Engine Oil	Green	Built-in
SF2T-10-01	10 L	290*160*346 mm	1.3 kg			
SF2T-20-01	20 L	330*190*476 mm	1.8kg			



Consult factory for other available models

NEW



Powered Stabilizing Jack

FEATURES & BENEFITS

- Optional electric or manual series
- Electric series includes waterproof switch and reset breaker
- A flip of switch is all it takes to take the sway out of your RV or trailer
- Each leg operates independently, navigating the surface until safely secured in place
- Automatically adjust to uneven, rugged terrain
- Durable Construction allows for stabilizing increased loads and fine leveling
- Strong corrosion resistance, light weight and high strength

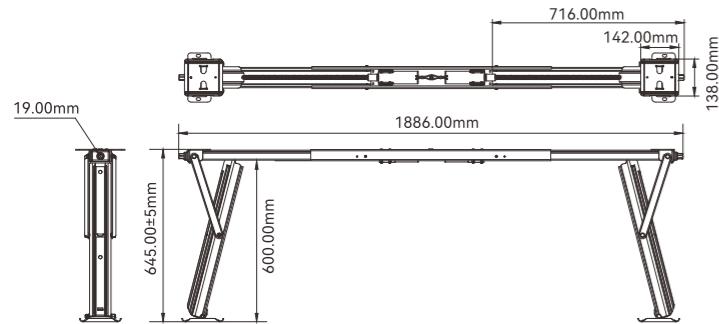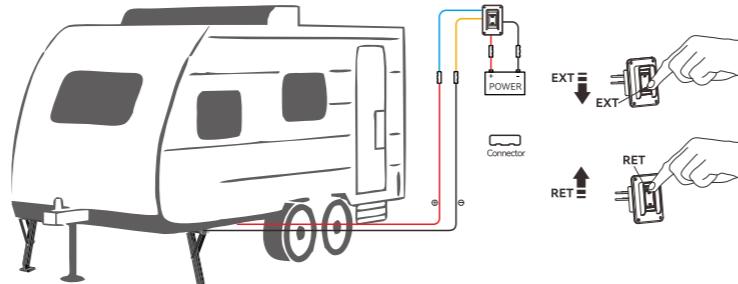

Electrical Powered Stabilizing Jack

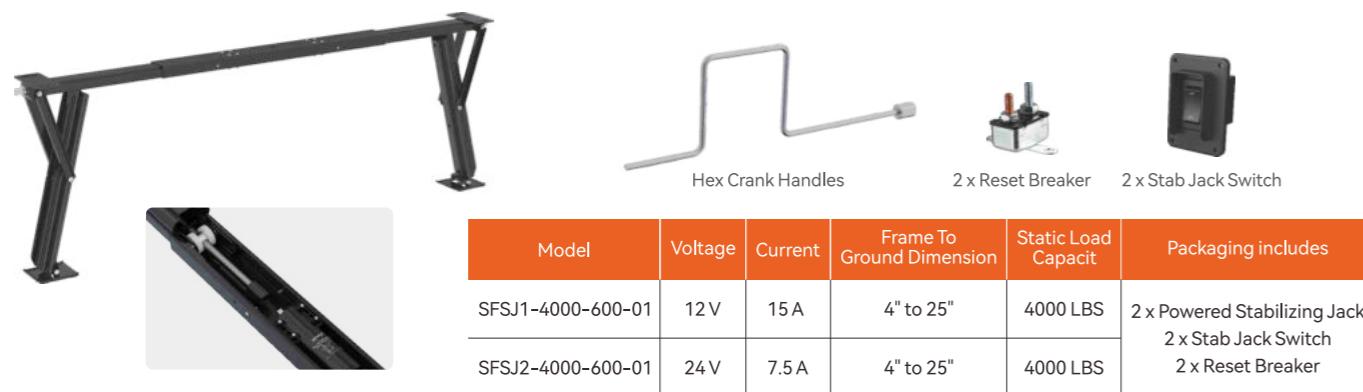

Manual Powered Stabilizing Jack



Model	Frame To Ground Dimension	Static Load Capacit	Packaging includes
SFSJM-4000-600-01	4" to 25"	4000 LBS	2 x Powered Stabilizing Jack 1 x Hex Crank Handles

C-type Stabilizing Jack



Model	Frame To Ground Dimension	Static Load Capacit	Packaging includes
SFSJS-4000-600-01	4" to 25"	4000 LBS	Single jack

Hex Crank Handles

FEATURES & BENEFITS

- Rust inhibitive zinc coating speed wrench design.
- Forged socket end for long life.
- Spin handle grips for easy operation.



Powered Stabilizing Jack Replacement Motor

FEATURES & BENEFITS

- Replacement Stabilizer Jack Components Motor
- The motor waterproof grade reaches Ip66

Model	Voltage	Current
SFSJ1-Motor-01	12 V	15 A
SFSJ2-Motor-01	24 V	7.5 A



Stab Jack Switch

With the flip of a switch, this ultra-fast, ultra-convenient electric stabilizer takes care of all the hassle sweat, and frustration that comes along with adjusting jacks, giving you optimal stabilization, no matter where you set up camp.

FEATURES & BENEFITS

- Exact replacement for power stabilizer extend/retract switch
- Allows you to lower and raise your RV's electric stabilizer jack
- Includes switch and wiring harness
- Waterproof, IP66-rated assembly
- Simple, rocker style operation

Product Specifications

Model	Voltage	Current
SFSP-030-07	12V / 24V DC	30A at 12V or 15A at 24V





Pex Pipe Fittings

- Compatible with PEX or PE-RT pipe
- Lead Free, Corrosion Resistant, Light Weight, High DurabilityApplicable to RV, drinking water, activity room, HVAC system and other fields



SFFE1-1212-01

Size: 1/2"Barb x 1/2"Barb
 Fitting Type: 1/2" Elbow Tower Fitting
 Material: PA66



SFFT1-1212-01

Size: 1/2"Barb x 1/2"Barb x 1/2"Barb
 Fitting Type: 1/2" Tee Tower Fitting
 Material: PA66



SFFE1-1220-01

Size: 1/2"-14MNPT x 1/2"Barb
 Fitting Type: 1/2" X 1/2" MNPT Adapter Elbows
 Material: PA66



SFFT1-1220-01

Size: 1/2"-14MNPT x 1/2"Barb x 1/2"Barb
 Fitting Type: 1/2" X 1/2"X 1/2" MNPT Tee Fitting
 Material: PA66



SFFS1-1220-01

Size: 1/2"-14FNPT x 1/2"Barb
 Fitting Type: 1/2" X 1/2" FNPT Swivel Adapter
 Material: PA66



SFFN1-1220-01

Size: 1/2"-14FNPT x 1/2"Barb
 Fitting Type: 1/2" X 1/2" FNPT Swivel Elbow
 Material: PA66

Fresh Water Pump Strainers



	51S01	52S01	52S02
Size:	1/2"-14 MNPT	3/4" Male Quick Attach	3/4"-14 FNPT
Fitting Type:	1/2"-14 FNPT Inline Filter / Strainer	1/2" Hose Barb	1/2"-14 FNPT Inline Filter / Strainer
Mesh Size:	50	50	50

Pressure Switches



	01 Series	02 Series	51 New/55/56A Series
Pressure Range	17-100 PSI	17-60 PSI	60 PSI
Max Amp.	15 A	25 A	20 A
Suitable For	21/22/33/41 short/42 short/43 short	41 long/42 long/43 long	51 New/55/56A/56C

Wiring Harness



Wiring Harness 1
 16 AWG wiring harness with on-off switch
 switch car adaptor
 Length: 95.27"
 Molded 2-pin connector: Yes



Wiring Harness 2
 18 AWG wiring harness with on-off switch,
 two 30-amp battery clips
 Length: 98.43"
 Molded 2-pin connector: Yes



Wiring Harness 3
 18 AWG wiring harness with on-off switch
 Length: 92.52"
 Molded 2-pin connector: Yes

Fresh Water Pump Fittings

**21F001**

Size: 15/32" X 3/8" Barb
Fitting Type: HB Elbow Fitting w/ O-Ring
Material: PA

**23F003**

Size: 5/8" QA x 1/4" Barb
Fitting Type: HB Straight Fitting w/ O-Ring
Material: PA

**41F004**

Size: 3/4" QA x 1/2" MNPT
Fitting Type: MNPT Straight w/ O-Ring
Material: Black Nylon

**51F003**

Size: 1/2" -14 FNPT x 1/2" Barb
Fitting Type: HSE Barb Elbow Fitting
Material: POM & PP

**21F002**

Size: 15/32" X 1/2" Barb
Fitting Type: HB Elbow Fitting w/ O-Ring
Material: PA

**23F004**

Size: 5/8" QA x 3/8" Barb
Fitting Type: HB Straight Fitting w/ O-Ring
Material: PA

**41F005**

Size: 3/4" QA x 1/2"
Fitting Type: TUBE Straight w/ O-Ring
Material: Black Nylon

**51F004**

Size: 1/2"-14 FNPT x 1/2"-14 MNPT
Fitting Type: MNPT Elbow Fitting
Material: POM & PP

**21F003**

Size: 1/4" x 1/4" QA
Fitting Type: TUBE Elbow Fitting w/ O-Ring
Material: POM

**23F005**

Size: 5/8" QA x 1/2" MNPT
Fitting Type: MNPT Elbow w/ O-Ring
Material: Black Nylon

**41F006**

Size: 3/4" QA x 3/4" Barb
Fitting Type: HS Straight Fitting w/ O-Ring
Material: Black Nylon

**51F005**

Size: 1/2" -14FNPT x 3/8" Barb
Fitting Type: HSE Barb Elbow Fitting
Material: POM & PP

**21F004**

Size: 15/32" X 3/8" Barb
Fitting Type: HB Elbow Fitting w/ O-Ring
Material: PA

**23F006**

Size: 5/8" QA x 1/2" MNPT
Fitting Type: MNPT Elbow w/ O-Ring
Material: Black Nylon

**41F007**

Size: 3/4" QA x 3/4" Barb
Fitting Type: Elbow Fitting w/ O-Ring
Material: Black Nylon

**51F006**

Size: 1/2" -14FNPT x 3/4" Barb
Fitting Type: HSE Barb Straight Fitting
Material: POM & PP

**21F005**

Size: 15/32" X 1/4" Barb
Fitting Type: HB Elbow Fitting w/ O-Ring
Material: PA

**41F001**

Size: 3/4" QA x 1/2" Barb
Fitting Type: HS Elbow Fitting w/ O-Ring
Material: Black Nylon

**42F001**

Size: 1/2" FNPT x G 1/2"
Fitting Type: NPT Standard to G Standard
Material: Copper

**51F009**

Size: 1/2" FNPT x1/2" FNPT
Fitting Type: HSE Barb Straight Fitting
Material: POM & PP

**23F001**

Size: 5/8" QA x 3/8" Barb
Fitting Type: HB Straight Fitting w/ O-Ring
Material: PA

**41F002**

Size: 3/4" QA x 1/2" MNPT
Fitting Type: MNPT Elbow w/ O-Ring
Material: Black Nylon

**51F001**

Size: 1/2" -14 FNPT x 1/2" Barb
Fitting Type: HSE Barb Straight Fitting
Material: POM & PP

**51F010**

Size: 1/2" FNPT x 3/4" MNPT
Fitting Type: HSE Barb Straight Fitting
Material: POM & PP

**23F002**

Size: 5/8" QA x 3/8" Barb
Fitting Type: HB Elbow Fitting w/ O-Ring
Material: PA

**41F003**

Size: 3/4" QA x 1/2" Barb
Fitting Type: HS Straight Fitting w/ O-Ring
Material: Black Nylon

**51F002**

Size: 1/2" -14 FNPT x 3/8" Barb
Fitting Type: HSE Barb Straight Fitting
Material: POM & PP