

# SEAFLO<sup>®</sup>

## LED Searchlight Remote Control Instructions




**Model: SFRC-01**

This wireless remote control is only compatible with SEAFLO LED searchlights. Compatible models include: SFSL-2700W-01W, SFSL-2700W-01B, SFSL-2700Y-01W, SFSL-2700Y-01B, SFSL-2700W-02W, SFSL-2700W-02B, SFSL-2700Y-02W, and SFSL-2700Y-02B.

### FEATURES

- Wireless remote control
- Controllable up to 50 m (164 ft)
- Creative one-key reset feature
- Features multiple function buttons
- Removable wrist strap
- High-quality and durable
- Convenient to carry and easy to use

## REMOTE CONTROL

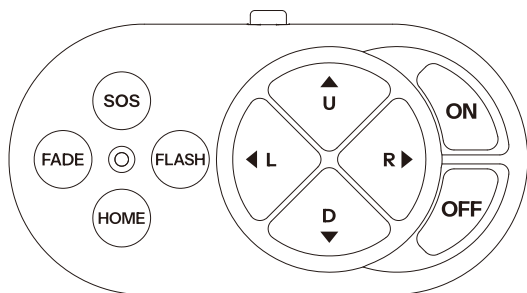

### Key Function:

ON: Turn on      OFF: Turn off

R: Right      D: Down

L: Left      U: Up

FLASH: Flashing function

HOME: Reset function

FADE: Gradually brighten and dim function

SOS: SOS function

### Remote Control Code Matching Setting

First, turn off the power to the searchlight, then turn it back on after 10 seconds. Within 60 seconds of restoring power, press and hold the ON button on the remote control for 10 to 30 seconds. If pairing is successful, the searchlight will flash three times, indicating that the code has been matched and the remote control is ready for use.

### Notice:

1. If the wireless remote control battery is low, the device will stop responding, and the indicator light will not illuminate when buttons are pressed. Please replace the battery.
2. Battery specifications: CR2032 3V.

## DIMENSIONS

